

WAAS CH 42522 W18A	APP CRS 185°	Rwy Idg 8606 TDZE 864 Apt Elev 887
--	------------------------	---

RNAV (GPS) RWY 18
DANE COUNTY RGNL/TRUAX FLD(MSN)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile and LNAV Cat C/D visibility to 1¾ miles.

A ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR
A5

MISSED APPROACH:
Climb to 3000 direct
DEKEY and hold.

ATIS	MADISON APP CON ★	MADISON TOWER ★	GND CON	CLNC DEL	UNICOM
124.65 278.3	135.45 343.7	119.3 (CTAF) 0 257.8	121.9 348.6	121.625	122.95

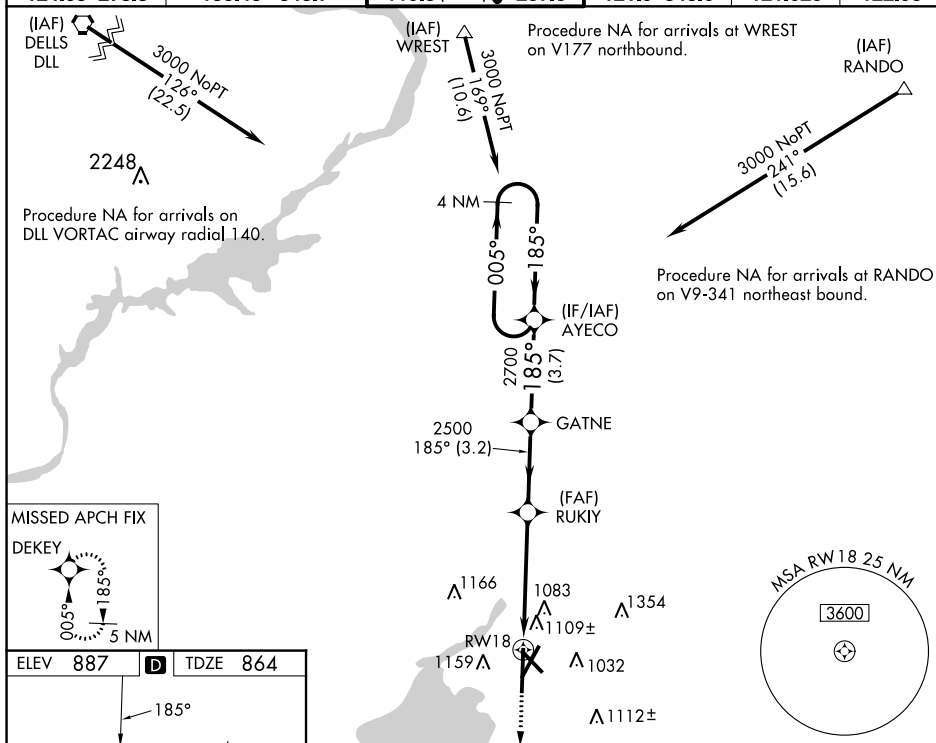

ELEV 887	D	TDZE 864
----------	----------	----------

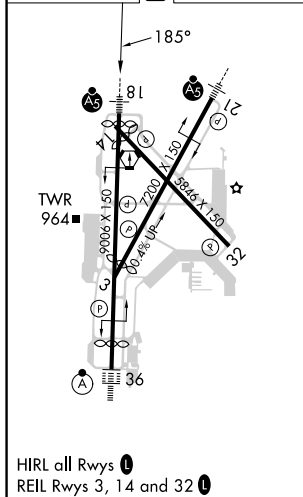


Diagram illustrating a 4 NM Holding Pattern for the 3000 MSL altitude. The pattern is a series of turns around a 2500 MSL fix. The diagram shows the 3000 MSL altitude, the 4 NM Holding Pattern, the 2500 MSL fix, and the 185° turns. The diagram also shows the 3000 MSL altitude, the 4 NM Holding Pattern, the 2500 MSL fix, and the 185° turns. The diagram also shows the 3000 MSL altitude, the 4 NM Holding Pattern, the 2500 MSL fix, and the 185° turns.