

LOC/DME I-PDP	APP CRS	Rwy Idg	27R	27L
108.95	268°	TDZE	8864	9912
Chan 26 (Y)		Apt Elev	11	10
			36	36

ILS or LOC RWY 27R

PHILADELPHIA INTL (PHL)

DME required.

▼ For inop ALS, increase S-LOC 27R Cat C/D visibility to 1½ SM.


▲ **RVR 1800 authorized with the use of FD or AP or HUD to DA.

27R MALSR

27L MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on MXE VORTAC R-115 to MXE VORTAC and hold.

D-ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON	CLNC DEL
ARR 133.4	124.35 319.15	118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35)	121.9 348.6	118.85 348.6
DEP 135.925		135.1 327.05 (Rwy 9R/27L)		

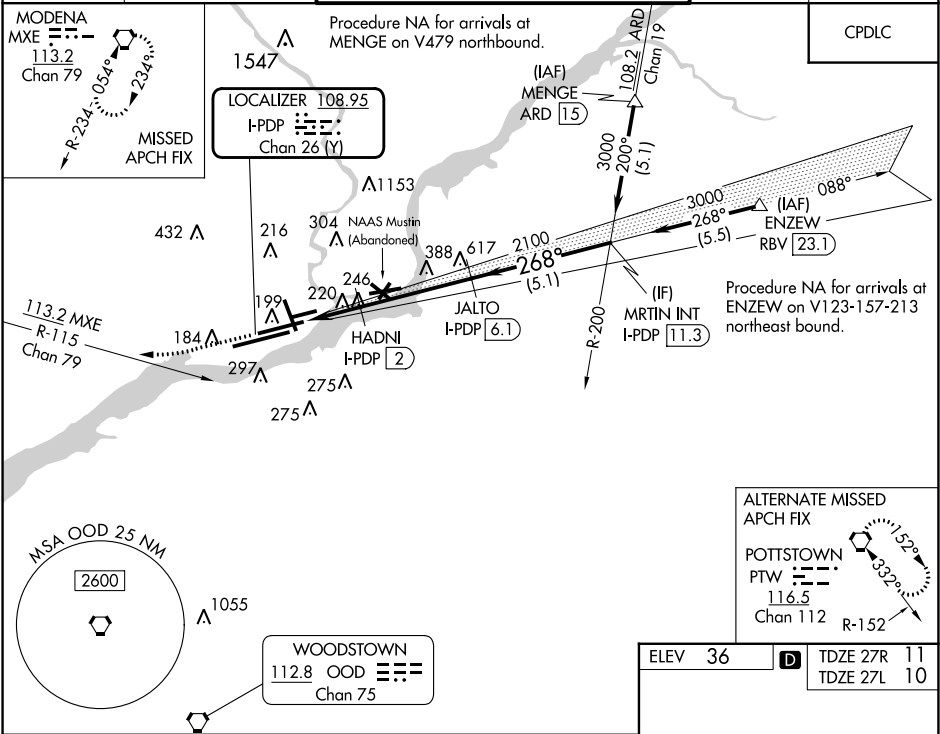

ALTERNATE MISSED APCH FIX

POTTSTOWN
PTW
116.5
Chan 112

R-152
152°
332°

