


APP CRS	Rwy Idg	10011
347°	TDZE	4410
	Apt Elev	4415

RNAV (GPS) X RWY 35L

RENO/TAHOE INTL (RNO)


RNP APCH - GPS	MALSR	MISSED APPROACH: Climb to 11000 direct TAKLE and hold, continue climb-in-hold to 11000. *Missed approach requires minimum climb of 250 feet per NM to 5600.
⚠ Circling to Rwy 8 NA at night. Baro-VNAV NA. For inop ALS increase LNAV Cat A and B visibility to 1¼ SM. Inop table does not apply to LNAV Cats C and D.		

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON	CLNC DEL	CPDLC
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6	124.9 370.85	

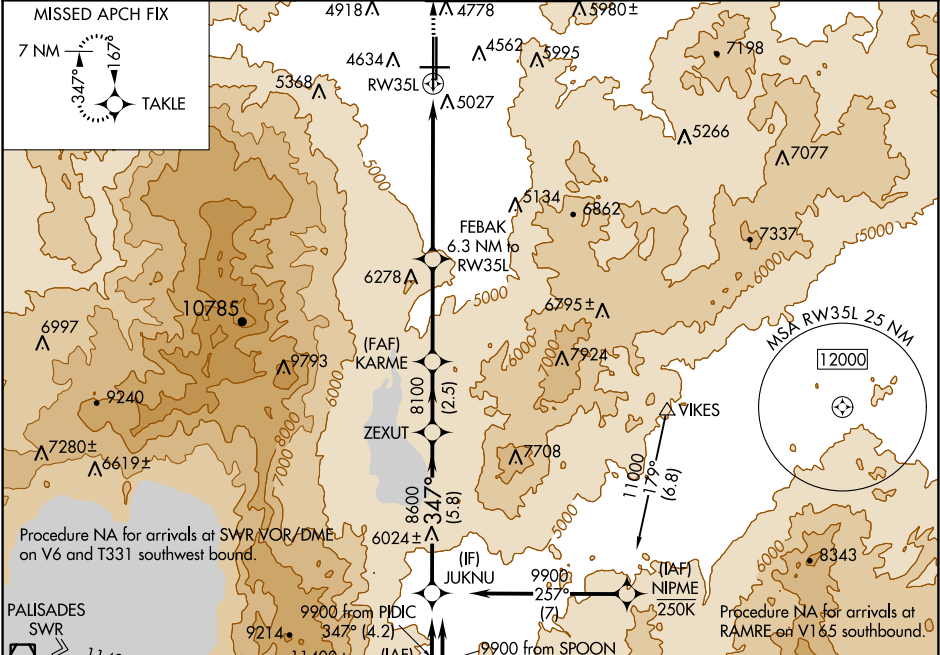

ELEV 4415	TDZE 4410
HIRL Rws 17R-35L and 17L-35R	
REIL Rws 8, 17L, 26, and 35R	
MIRL Rwy 8-26	

CATEGORY	A	B	C	D
LNAV/VNAV DA*	5480-4	1070 (1100-4)		
LNAV/VNAV DA	5521-4	1111 (1200-4)		
LNAV MDA*	5480-¾ 1070 (1100-¾)	5480-1 1070 (1100-1)	5480-2½ 1070 (1100-2½)	
LNAV MDA	5560-¾ 1150 (1200-¾)	5560-1 1150 (1200-1)	5560-3 1150 (1200-3)	
CIRCLING	5560-1¼ 1145 (1200-1¼)	5560-1½ 1145 (1200-1½)	6460-3 2045 (2100-3)	

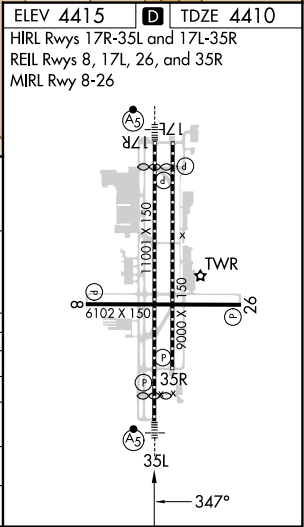

SW-4, 21 MAR 2024 to 18 APR 2024

SW-4, 21 MAR 2024 to 18 APR 2024