

WAAS CH 65925 W18A	APP CRS 179°	Rwy Idg TDZE 275 Apt Elev 279	5001 275 279
--	------------------------	---	---

RNAV (GPS) RWY 18

WALNUT RIDGE RGNL (ARG)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV DA to 529 feet, LNAV/VNAV DA to 579 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM. For inoperative ODALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cat C and D visibility to 1 mile. Baro-VNAV and VDP NA with Jonesboro altimeter setting.

ODALS

MISSED APPROACH:

Climb to 3100 direct GUBFO and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

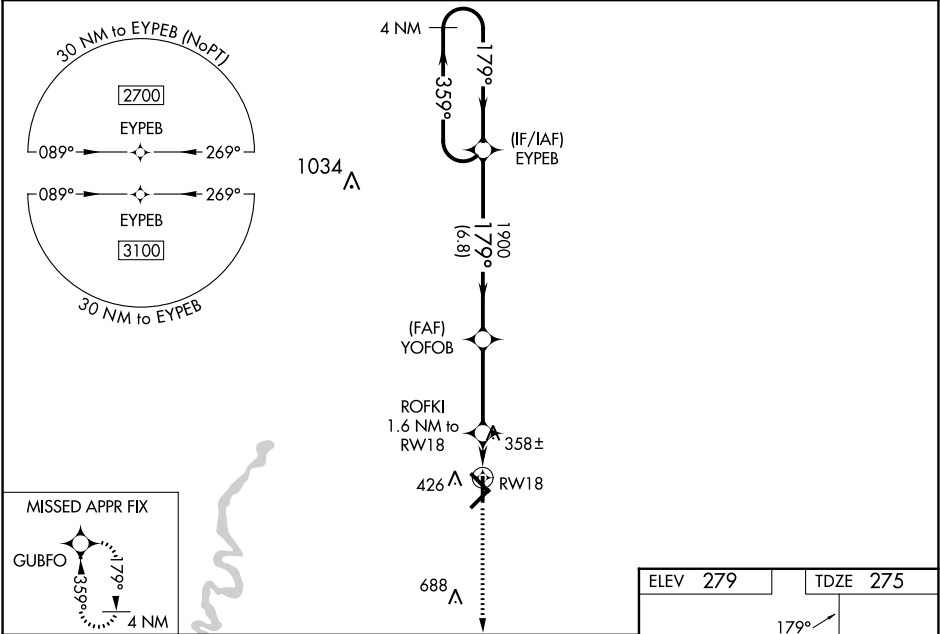

MISSED APPR FIX		ELEV 279		TDZE 275	
GUBFO		3100		GUBFO	
4 NM Holding Pattern		EYEBC		YOFOB	
2700		359°		179°	
GP 3.00°		TCH 45		*LNAV only.	
6.8 NM		3.4 NM		0.6 NM	
CATEGORY		A		B	
LPV DA		475-¾		200 (200-¾)	
LNAV/VNAV DA		525-¾		250 (300-¾)	
LNAV MDA		620-¾		345 (400-¾)	
CIRCLING		760-1		481 (500-1)	

