


WAAS CH 77825 W04A	APP CRS 044°	Rwy Idg TDZE Apt Elev	6001 279 279
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

WALNUT RIDGE RGNL (ARG)

RNP APCH - GPS.	MALSF	MISSED APPROACH: Climb to 2700 direct ESEGE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. Inop table does not apply to LPV and LNAV/VNAV all Cats.		

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

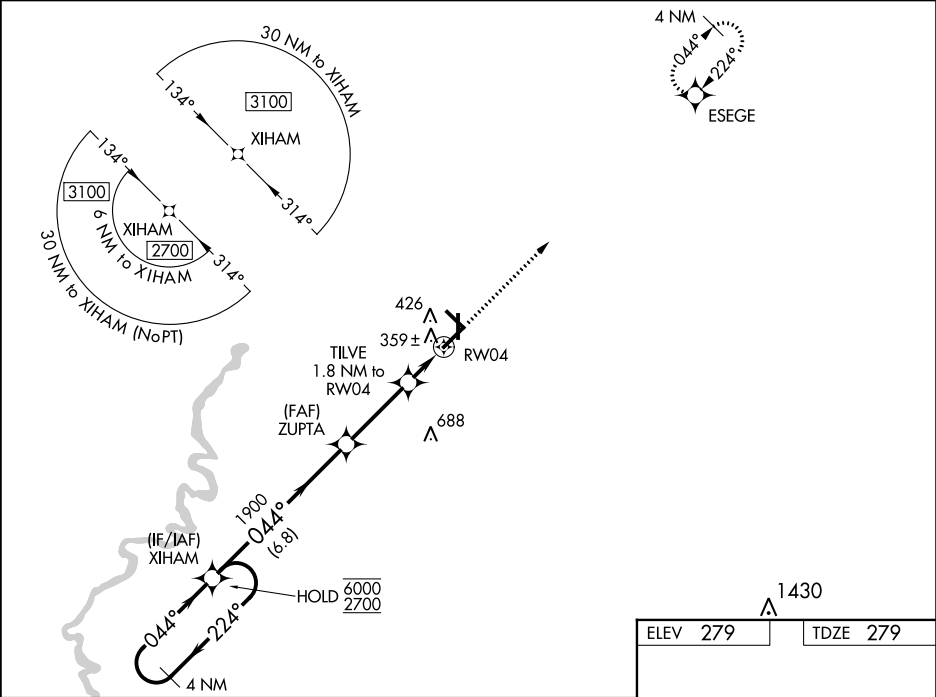

4 NM Holding Pattern		XIHAM		ZUPTA		TILVE		RWY 04		ESEGE	
6000 2700		224° 044°		1900		1.8 NM to RWY 04		0.9 NM to RWY 04		2700	
GP 3.00° TCH 45		044°		900		0.9 NM to RWY 04		RWY 04		ESEGE	
		6.8 NM		3.1 NM		0.9 NM		0.9 NM			
CATEGORY		A		B		C		D			
LPV DA		529-¾		250 (300-¾)							
LNAV/VNAV DA		529-¾		250 (300-¾)							
LNAV MDA		620-¾		341 (400-¾)							
CIRCLING		840-1 561 (600-1)		840-1½ 561 (600-1½)		1000-2¼ 721 (800-2¼)					

