

WAAS CH 99611 W32A	APP CRS 323°	Rwy Idg 9001 TDZE 1293 Apt Elev 1297
--	------------------------	---



RNAV (GPS) RWY 32
MANSFIELD LAHM RGNL (MFD)

⚠ Baro-VNAV NA w/in using Marion altimeter setting. For uncompensated Baro-VNAV systems, INAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter not received, use Marion altimeter setting and increase all DA 107 feet and all MDA 120 feet, INAV/VNAV all Cts visibility ½ SM, INAV Ctd C/D visibility ¾ SM and Circling Ctd C/D visibility ½ SM. For inop MALSR when using Marion altimeter setting increase LPV all Cts visibility to 1. VDP NA with Marion altimeter setting. ** RVR 1800 authorized with use of FD or AP or HUD to DA. NA when using Marion altimeter setting.





MISSED APPROACH.
Climb to 3000 direct
UPIYO and hold.

ATIS 125.3	CLEVELAND APP CON ★ 124.2 360.65	MANSFIELD TOWER ★ 119.8 (CTAF) 0 291.775	GND CON 121.8 291.775	UNICOM 122.95
---------------	-------------------------------------	---	--------------------------	------------------

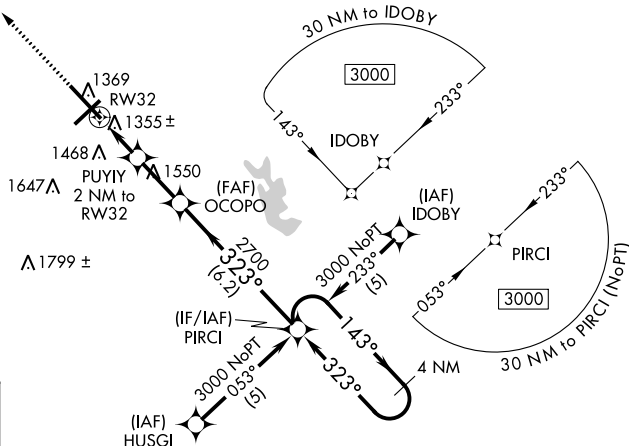

ELEV 1297	D	TDZE 1293
-----------	----------	-----------

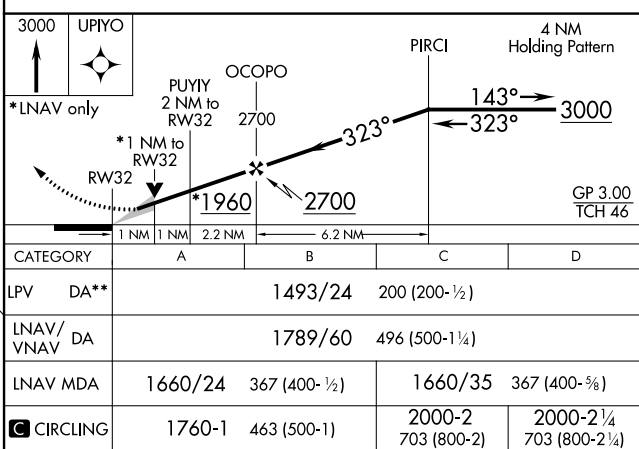

MANFIELD, OHIO
Orig-F 13AUG20

40°49'N-82°31'W

MANSFIELD LAHM RGNL (MFD)
RNAV (GPS) RWY 32

EC-2, 21 MAR 2024 to 18 APR 2024