
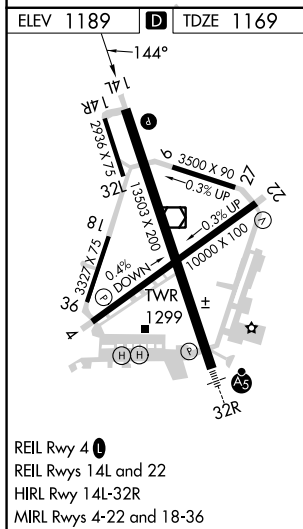


RNAV (GPS) Y RWY 14L
GRANT COUNTY INTL (MWH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C.
▲ Baro-VNAV and VDP NA when using Ephrata altimeter setting. When local altimeter setting not received, use Ephrata altimeter setting; increase all DA 36 feet and all MDA 40 feet, increase LNAV/VNAV visibility all Cats ½ SM, LNAV Cats C and D and Circling Cat D ¼ SM.

MISSED APPROACH: Climb to 4000 direct HEDBI and on track 124° to UPBOB and hold.

ATIS 119.05	GRANT COUNTY APP CON ★ 126.4 379.95	GRANT COUNTY TOWER★ 118.25 (CTAF) 0 257.8 (EAST) 128.0 257.8 (WEST)	GND CON 121.9	UNICOM 122.95
----------------	--	---	------------------	------------------

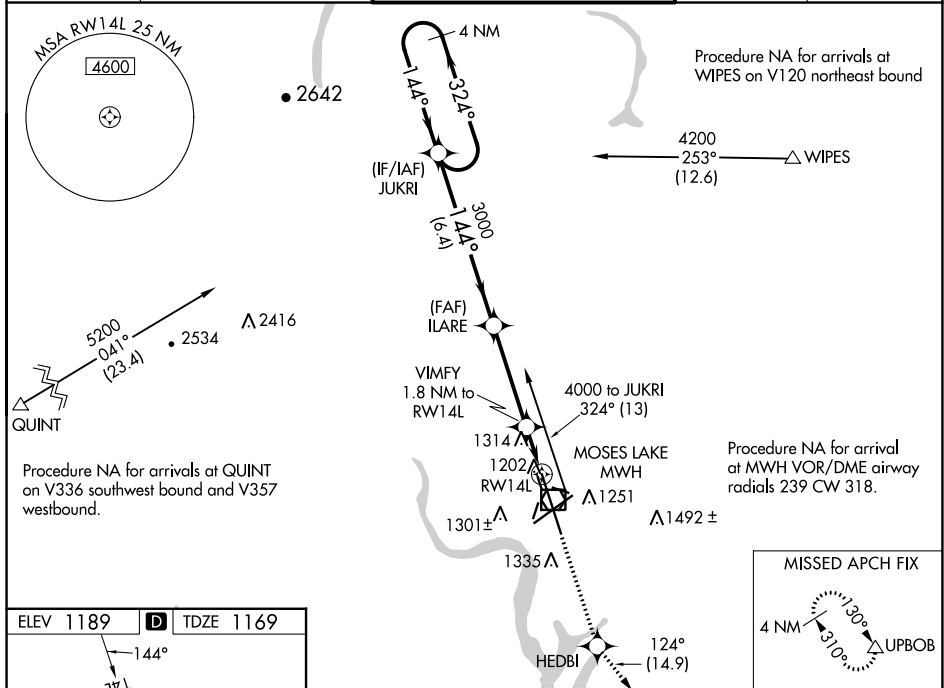

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).				4000 ↑	HEDBI	tr 124°	UPBOB
4000 ← 324° 144° → GP 3.00° TCH 52				JUKRI	ILARE 3000	VIMFY 1.8 NM to RW14L	*1.1 NM to RW14L RW14L
6.4 NM 3.8 NM 0.7 1.1 NM				*1780			*RNAV only.
CATEGORY	A		B		C		D
LPV DA	1369- $\frac{3}{4}$		200 (200- $\frac{3}{4}$)				
RNAV/ VNAV	1436- $\frac{7}{8}$		267 (300- $\frac{7}{8}$)				
RNAV MDA	1580-1 411 (400-1)		1580-1 $\frac{1}{8}$ 411 (400-1 $\frac{1}{8}$)				
CIRCLING	1660-1 471 (500-1)		1680-1 $\frac{1}{2}$ 491 (500-1 $\frac{1}{2}$)		1820-2 631 (700-2)		