| WAAS | APP CRS | | |
|---|---|---|---|
| CH **93702** | **057°** | Rwy Idg | **7201** |
| **W06A** | | TDZE | **2351** |
| | | Apt Elev | **2351** |

# RNAV (GPS) RWY 6

## GENERAL WM J FOX AIRFIELD (WJF)

T When VGSI inop, Straight-in/Circling Rwy 6 procedure NA at night.
A DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
W For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 45°C (113°F). When local altimeter setting not received, use Palmdale altimeter setting: increase LPV DA to 2661 feet, LNAV/VNAV DA to 2709 feet and all MDAs 60 feet, and increase Circling Cats C/D visibility ¼ SM. Baro-VNAV NA when using Palmdale altimeter setting.

MISSED APPROACH: Climb to 6000 direct SISOY and via 091° track to ETHER and hold.

| ATIS | JOSHUA APP CON | FOX TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| **126.3** | **126.1 290.3** | **118.525** (CTAF) **256.9** | **121.7 256.9** | **122.95** |

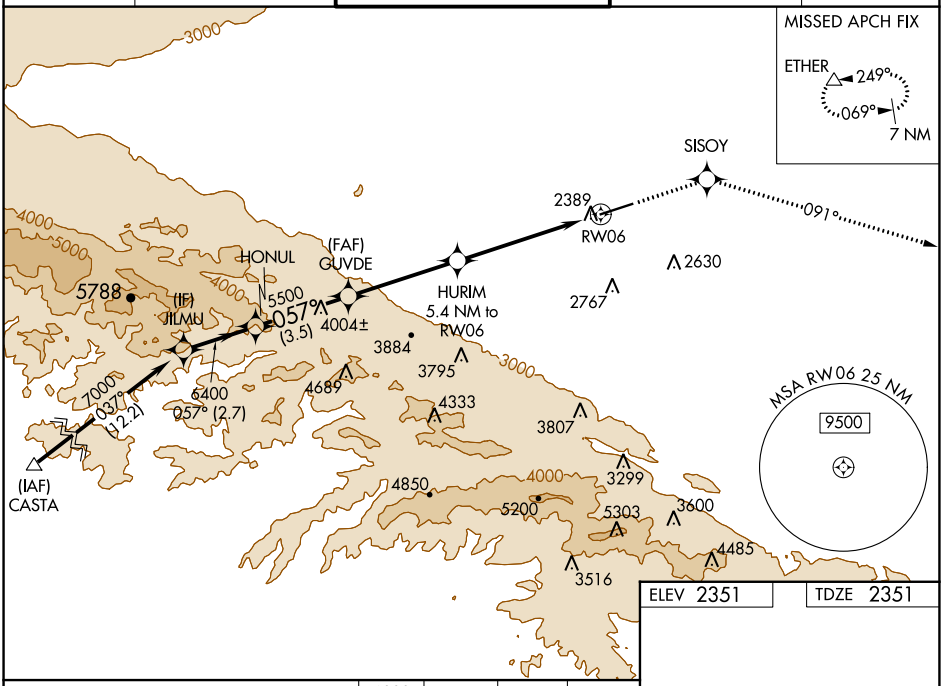


ELEV 2351 TDZE 2351

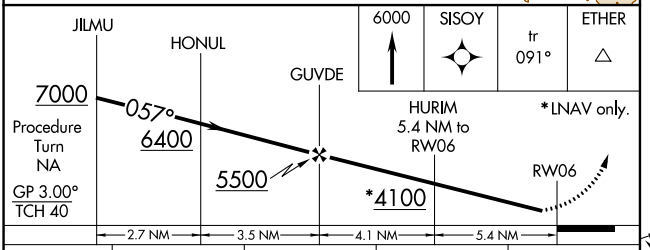





| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 2601-1 250 (300-1) | | | |
| LNAV/VNAV DA | 2649-1 298 (300-1) | | | |
| LNAV MDA | 2940-1 589 (600-1) | | 2940-1½ 589 (600-1½) | 2940-1¾ 589 (600-1¾) |
| CIRCLING | 2940-1 589 (600-1) | | 3120-2¼ 769 (800-2¼) | 3120-2½ 769 (800-2½) |

REIL Rwys 6 and 24
MIRL Rwy 6-24



SW-3, 21 MAR 2024 to 18 APR 2024
SW-3, 21 MAR 2024 to 18 APR 2024