

WAAS CH 72828 W02A	APP CRS 018°	Rwy Idg 5000 TDZE 1151 Apt Elev 1165
--	------------------------	---

RNAV (GPS) RWY 2
ATLANTIC MUNI (AIO)

⚠ DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA when using Harlan altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Harlan altimeter setting: increase LPV DA to 1450 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1563 feet and all visibilities ½ SM; increase all MDA 60 feet, and LNAV visibility Cat C ½ SM and Circling visibility Cat B/C ½ SM. Circling Rwy 12, 30 NA at night.

MISSED APPROACH:
Climb to 4000 direct
VAKUC and hold.

AWOS-3 127.825	MINNEAPOLIS CENTER 119.6 290.4	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

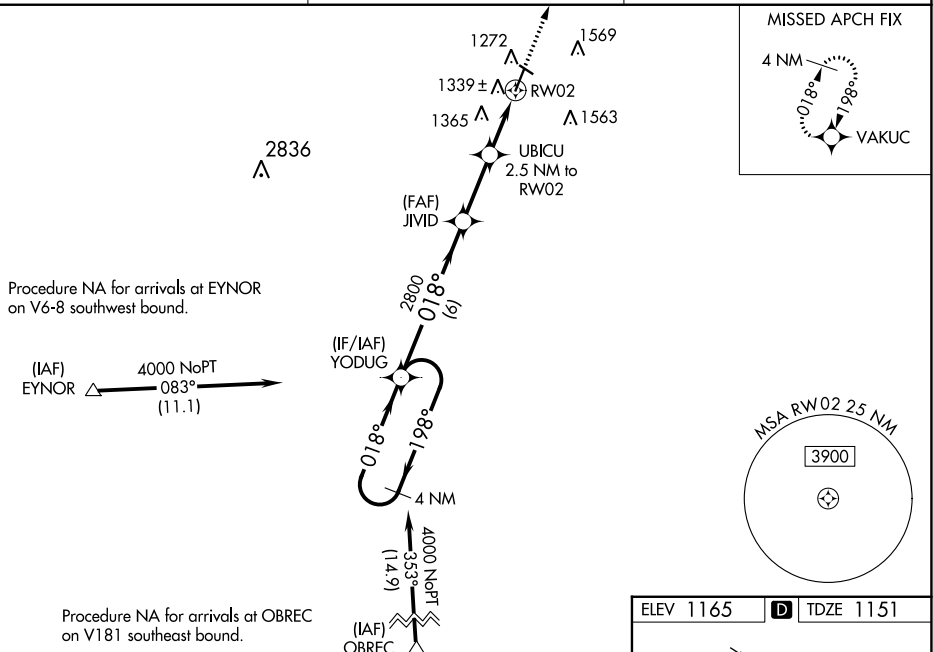


Diagram illustrating the VOR/DME station at VAKUO (RJVV) and the VOR/DME glidepath not coincident (VGS Angle 3.00/TCH 31).

Key locations and distances shown:

- VOR/DME Station:** VAKUO (RJVV)
- GP 3.00° TCH 39**
- Distances:** 4000, 198°, 018°, 2800, 6 NM, 2.6 NM, 1.1 NM, 1.4 NM
- Other labels:** 4 NM Holding Pattern, YODUG, JIVID, UBICU, 2.5 NM to RW02, *1.4 NM to RW02, *1980, *LNAV only

