

WAAS CH 99619 W16A	APP CRS 159°	Rwy Idg TDZE 1999 Apt Elev 1999	6501 1999 1999
--	------------------------	---	---


RNAV (GPS) RWY 16

HAYS RGNL (HYS)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F).
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Russell altimeter setting: increase LPV DA to 2318 feet; increase LNAV/VNAV DA to 2445 feet and visibility all Cats ½ SM; increase all MDA 80 feet and visibility LNAV and Circling Cat C and D ¼ SM. Baro-VNAV NA when using Russell altimeter setting. Circling NA for Cat D northwest of Rwy 4 and west of Rwy 16.

MISSED APPROACH:
Climb to 4000 direct GEYJA and hold.

AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

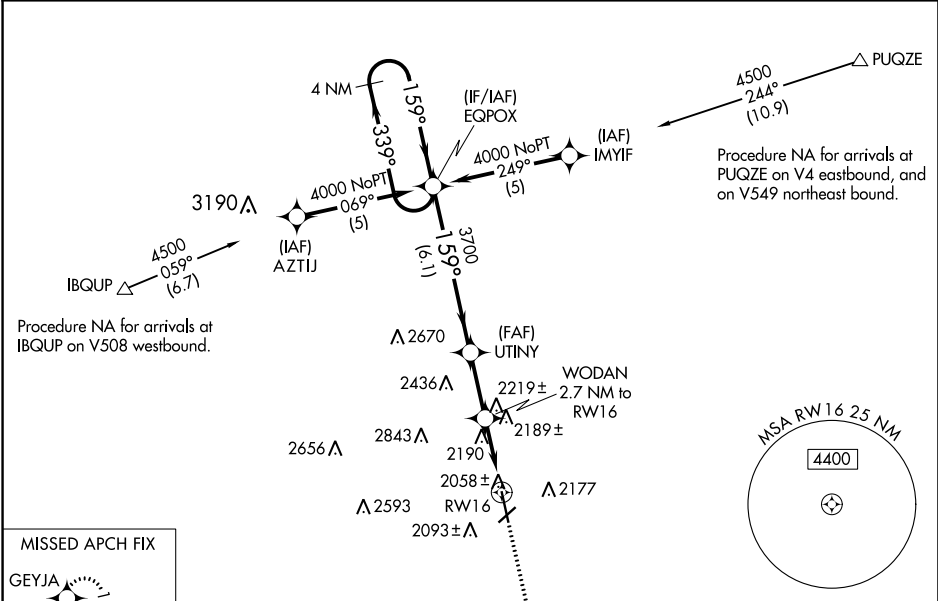

MISSED APCH FIX		GEYJA	
4000		4000	
EQPOX		UTINY	
4000		3700	
GP 3.00°		WODAN	
TCH 43		2.7 NM to RW16	
6.1 NM		2.4 NM	
2.7 NM		2.7 NM	
RW16		RW16	
*2900		*2900	
*NAV only		*NAV only	
CATEGORY		CATEGORY	
A		B	
LPV DA		2249-1 250 (300-1)	
LNAV/VNAV DA		2308-1 309 (400-1)	
LNAV MDA		2440-1 441 (500-1)	
CIRCLING		2480-1 481 (500-1)	

