

LOC/DME I-HEW 110.5 Chan 42	APP CRS 168°	Rwy Idg TDZE 152 Apt Elev 152	6002
---	------------------------	---	-------------


LOC RWY 17R
DAVID WAYNE HOOKS MEML (DWH)

RADAR required for procedure entry.

When local altimeter setting not received, use George Bush Intcnl/Houston altimeter setting and increase all MDA 40 feet; increase S-LOC 17R Cats C/D visibility ½ mile. Circling NA to Rwy 17W and 35W. Rwy 17R helicopter visibility reduction below ¾ SM NA. Circling Rwy 35R NA at night.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 on heading 325° and IAH VORTAC R-293 to TNV VOR/DME and hold.

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER★ 127.4 354.1 EAST 118.4 (CTAF) 354.1 WEST	GND CON 121.8 239.0	CLNC DEL 119.45	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------------	---------------------------	-------------------------

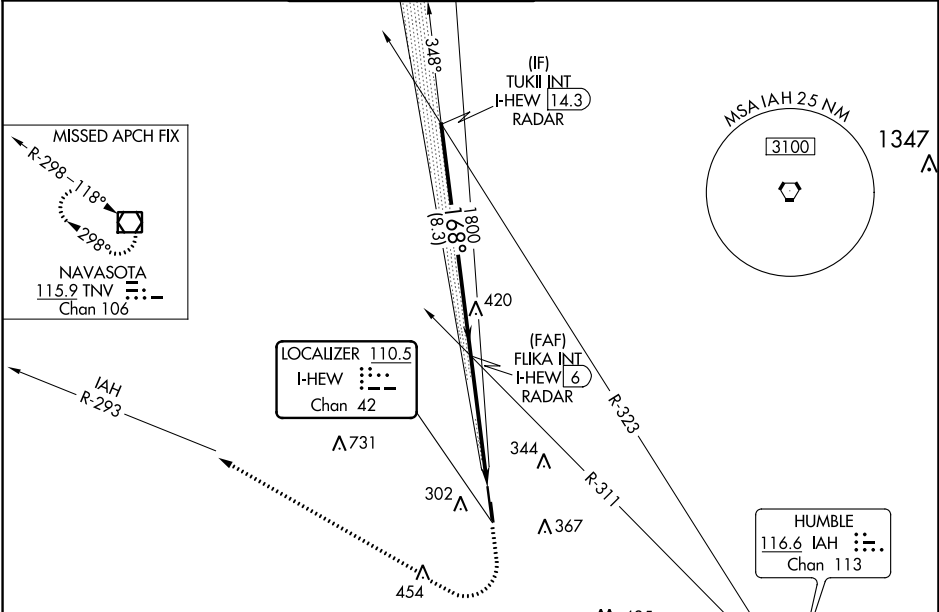

ELEV 152 TDZE 152

168°
17R
WATER RWY
17W-35W
2530 X 100
Rwy 17L-35R
3500 X 35

7009 X 100
35W
35L
35R

HIRL Rwy 17R-35L
REIL Rwy 17R and 35L

FAF to MAP 4.9NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

Visual Segment - Obstacles.

1200 2000 IAH R-293 TNV

2000 168° 1800

8.3 NM 4.9 NM

CATEGORY	A	B	C	D
S-LOC 17R	640-1 488 (500-1)	640-1 488 (500-1)	640-1 488 (500-1)	640-1 488 (500-1)
CIRCLING	640-1 488 (500-1)	660-1 508 (600-1)	680-1 528 (600-1)	780-2 628 (700-2)