

FAIRHOPE, ALABAMA

AL-5522 (FAA)

23334

WAAS CH 99313 W19A	APP CRS 190°	Rwy Idg 6604 TDZE 91 Apt Elev 91
--	------------------------	---

RNAV (GPS) RWY 19


T Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).

A DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

Procedure NA for arrivals on
BFM VORTAC airway
radials 319 CW 052.

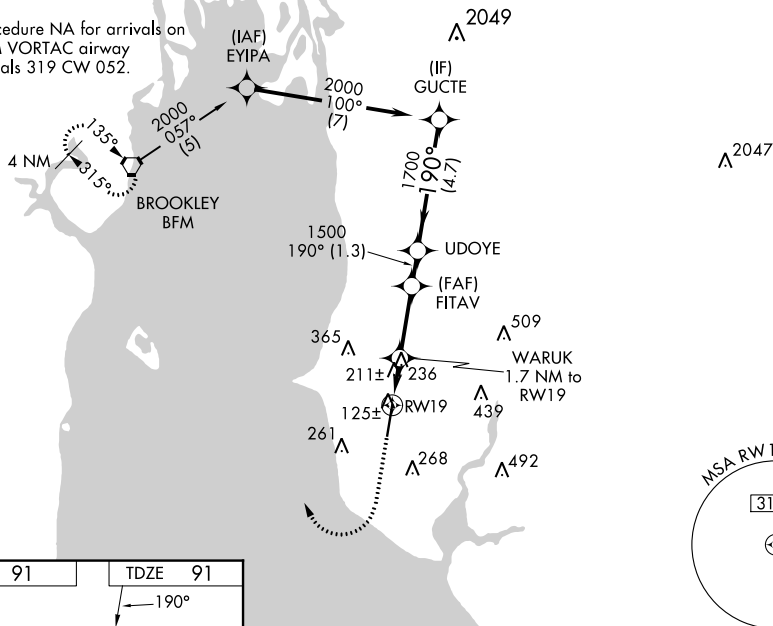

MSA RW19 25 NM
3100

ELEV 91

TDZE 91

190°

61

604 X 100

1

HIRL Rwy 1-19

REIL Rws 1 and 19

1500 ↑	2000 ↗	BFM 	GUCTE <u>2000</u> Procedure Turn NA GP 3.00° TCH 35			
*LNAV only. WARUK 1.7 NM to RW19 *1.2 NM to RW19 RW19			FITAV 1500 660*	UDOYE 1700 1500	190°	
1.2 0.5 2.6 1.3 NM 4.7 NM						
CATEGORY	A		B		C	D
LPV DA	341-7/8 250 (300-7/8)					
LNAV/ VNAV DA	513-1½ 422 (500-1½)					
LNAV MDA	500-1 409 (500-1)		500-1½ 409 (500-1½)			
CIRCLING	560-1 469 (500-1)	580-1 489 (500-1)	720-1¾ 629 (700-1¾)		740-2 649 (700-2)	

FAIRHOPE, ALABAMA
Amdt 2B 20MAY21

30°28'N-87°53'W

H L SONNY CALLAHAN (CQF)
RNAV (GPS) RWY 19

SE-4, 21 MAR 2024 to 18 APR 2024

SE-4, 21 MAR 2024 to 18 APR 2024