


|                                        |                        |                                                   |                                         |
|----------------------------------------|------------------------|---------------------------------------------------|-----------------------------------------|
| WAAS<br>CH <b>81927</b><br><b>W07A</b> | APP CRS<br><b>073°</b> | Rwy Idg<br>TDZE <b>730</b><br>Apt Elev <b>730</b> | <b>4491</b><br><b>730</b><br><b>730</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-----------------------------------------|

RNAV (GPS) RWY 7

WILLIAMS COUNTY (ØG6)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                       |                               |                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-------------------------------|----------------------------------------------------------|
| <div>▼</div> <div>▲NA</div> <div>Baro-VNAV NA. When VGSI inop, Straight-in/Circling Rwy 7 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Defiance Meml altimeter setting; when not received, use De Kalb County altimeter setting; increase LPV DA to 1063 and all visibilities ¼ SM, LNAV/VNAV DA to 1300 and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV and Circling visibility Cats C/D ¼ SM.</div> |                                       |                               | MISSED APPROACH:<br>Climb to 3000 direct ROYYS and hold. |
| DFI ASOS<br><b>121.425</b>                                                                                                                                                                                                                                                                                                                                                                                                                                    | TOLEDO APP CON<br><b>134.35 307.0</b> | UNICOM<br><b>122.8</b> (CTAF) | <b>123.0</b> <b>Ø</b>                                    |

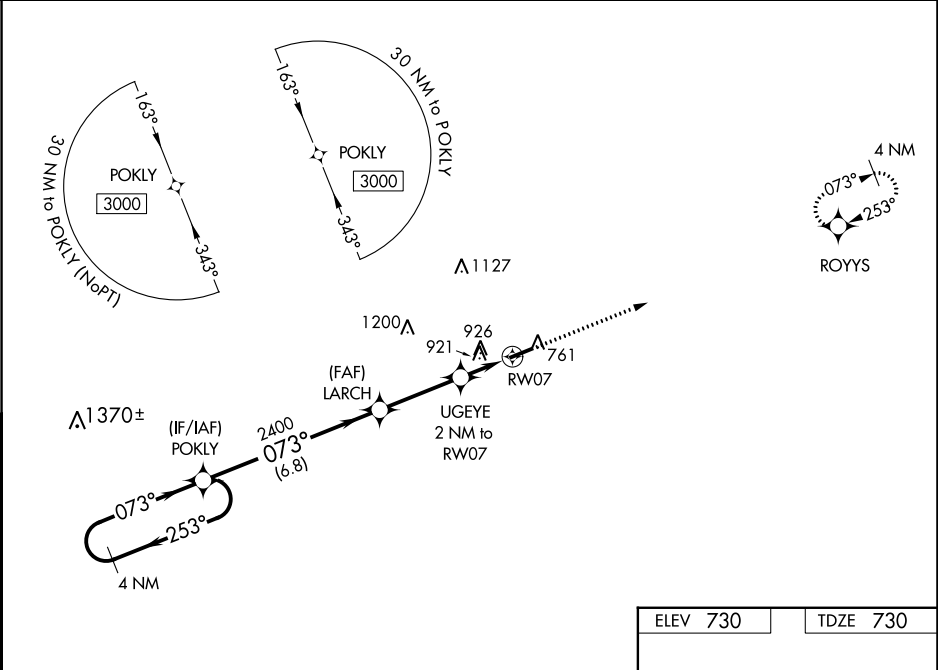

|                            |  |         |              |         |              |              |       |      |
|----------------------------|--|---------|--------------|---------|--------------|--------------|-------|------|
| 4 NM Holding Pattern POKLY |  | 3000    | 253°         | 073°    | POKLY        | LARCH        | UGEYE | RW07 |
| GP 3.00° TCH 35            |  | 3000    | 253°         | 073°    | POKLY        | LARCH        | UGEYE | RW07 |
| 6.8 NM                     |  | 3.1 NM  | 2 NM         |         |              |              |       |      |
| CATEGORY                   |  | A       | B            | C       | D            |              |       |      |
| LPV DA                     |  | 1003-1  | 273 (300-1)  |         |              |              |       |      |
| LNAV/VNAV DA               |  | 1240-1¾ | 510 (600-1¾) |         |              |              |       |      |
| LNAV MDA                   |  | 1260-1  | 530 (600-1)  | 1260-1½ | 530 (600-1½) |              |       |      |
| CIRCLING                   |  | 1300-1  | 570 (600-1)  | 1300-1½ | 1520-2½      | 790 (800-2½) |       |      |

