

WAAS CH 49035 W27A	APP CRS 273°	Rwy Idg TDZE 1198 Apt Elev 1198
--	------------------------	---

RNAV (GPS) RWY 27

PORTAGE COUNTY (POV)



- ▼

Baro-VNAV NA when using Akron-Canton Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
- ▲

When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting and increase all DA 50 feet and all MDA 60 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ¼ mile and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below 1 SM NA. Night landing Cat C: Procedure NA.

MISSED APPROACH:
Climb to 4000 direct
IWWEB and hold.

AWOS-3 118.675	CLEVELAND APP CON* 125.5 371.875	CLNC DEL 125,65	UNICOM 123.05 (CTAF) 1
--------------------------	--	---------------------------	----------------------------------

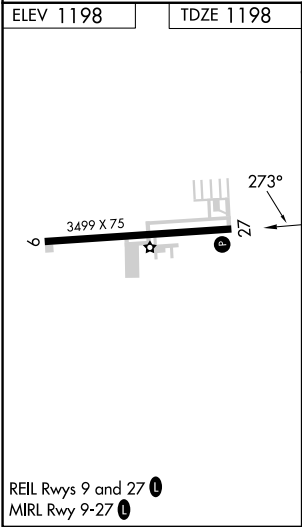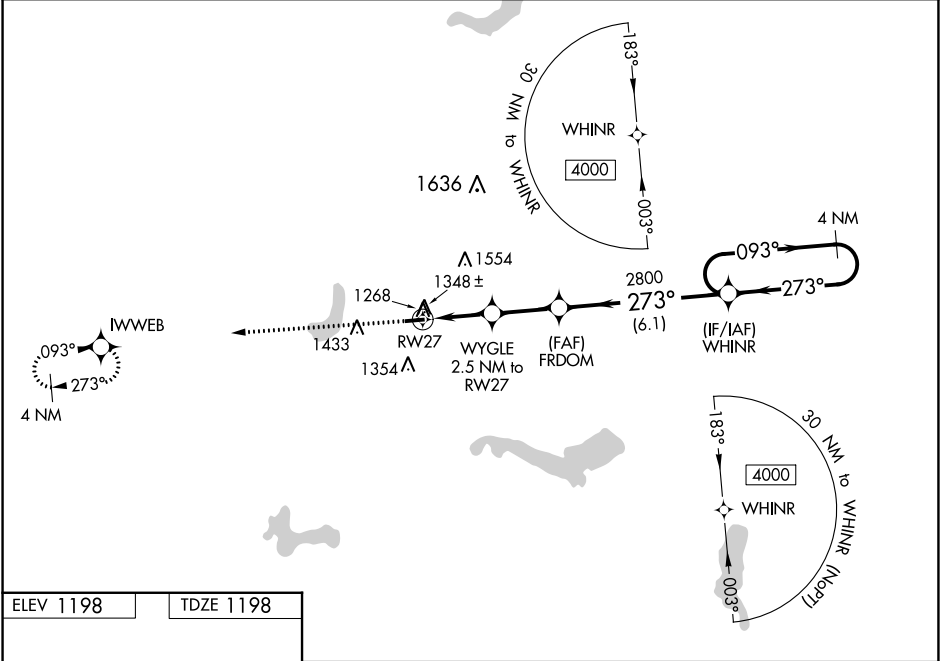

4000	IWWEB	FRDOM	WHINR	4 NM Holding Pattern
*LNAV only	WYGLE 2.5 NM to RW27	2800	273°	093° → 4000
RW27	*2020	2800	273°	GP 3.00° TCH 43
2.5 NM	2.4 NM	6.1 NM		
CATEGORY	A	B	C	D
LPV DA	1471-1	273 (300-1)		NA
LNAV/VNAV DA	1546-1 ½	348 (400-1 ½)		NA
LNAV MDA	1640-1	442 (500-1)	1640-1 ¾	442 (500-1 ¾)
CIRCLING	1740-1	1800-1	1920-2	722 (800-2)
	542 (600-1)	602 (700-1)		NA

REIL Rwy 9 and 27 1
MIRL Rwy 9-27 1