

WAAS CH 81836 W05A	APP CRS 054°	Rwy Idg TDZE 255 Apt Elev 270
--	------------------------	---

RNAV (GPS) RWY 5

COLUMBIA/MARION COUNTY (ØRØ)

RNP APCH - GPS.


▼

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
When local altimeter setting not received, use Hattiesburgh/Laurel Rgnl altimeter setting and increase all DA 66 feet and all MDA 80 feet; increase LPV all Cats visibility ½ mile and LNAV/VNAV all Cats and Circling Cat C visibilities ¼ mile, increase Circling Cat D visibility ½ mile, increase LNAV Cat C and D visibility ¾ mile. VDP and Baro-VNAV NA when using Hattiesburgh/Laurel Rgnl altimeter setting. Rwy 5 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2400 direct
NERAE and hold.

AWOS-3PT 120.675	HOUSTON CENTER 126.8 327.8	UNICOM 122.8 (CTAF)Ø
----------------------------	--------------------------------------	--------------------------------

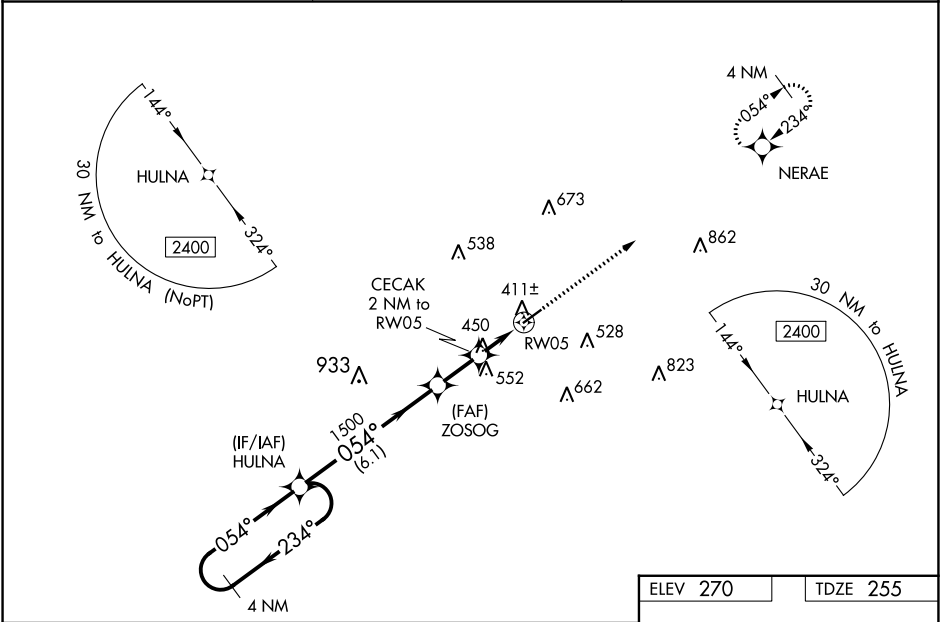

4 NM Holding Pattern

HULNA

2400 ← 234°
054° →

GP 3.00°
TCH 40

ZOSOG

CECAK 2 NM to RW05

*1.5 NM to RW05

RW05

2400 NERAE

*LNAV only.

054°

1500

*920

6.1 NM

1.8 NM

0.5 NM

1.5 NM

CATEGORY	A	B	C	D
LPV DA	505-7 ⁵ / ₈ 250 (300-7 ⁵ / ₈)			
LNAV/VNAV DA	743-1 ⁵ / ₈ 488 (500-1 ⁵ / ₈)			
LNAV MDA	760-1 505 (500-1)	760-1 ³ / ₈ 505 (500-1 ³ / ₈)		
CIRCLING	760-1 490 (500-1)	820-1 550 (600-1)	920-1 ³ / ₄ 650 (700-1 ³ / ₄)	1000-2 ¹ / ₄ 730 (800-2 ¹ / ₄)

REIL Rwy 5 and 23Ø
MIRL Rwy 5-23 Ø