

APP CRS
011°

Rwy Idg
TDZE
Apt Elev

5000
65
65


RNAV (GPS) RWY 1
INVERNESS (INF')

⚠

When local altimeter setting not received, use Ocala altimeter setting and increase all MDA 60 feet; and increase LNAV Cat C visibility 1/8 mile and Circling Cat C visibility 1/4 mile. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Procedure NA at night.

MISSED APPROACH: Climb to 2000 direct GIOVA and on track 050° to VANNI and hold.

AWOS-3 119.975	JACKSONVILLE APP CON 118.6 251.15	UNICOM 122.725 (CTAF) 0
-------------------	--------------------------------------	----------------------------

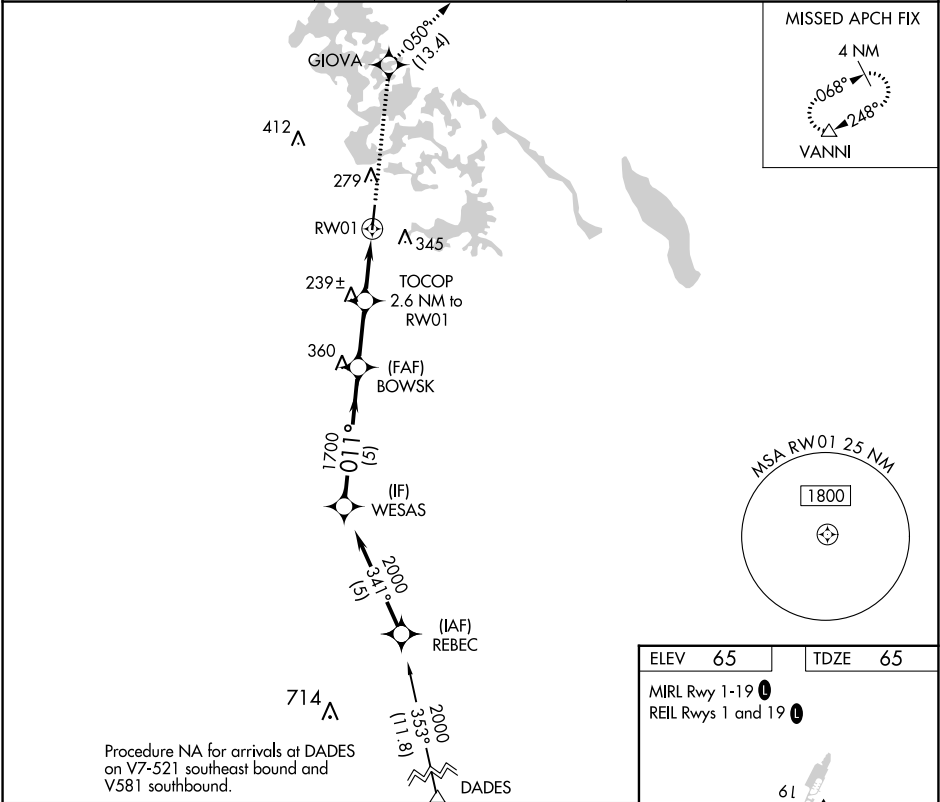

WESAS

2000

011°

BOWSK

1700

3.00° TCH 47

940

TOCOP 2.6 NM to RW01

RW01

Procedure NA for arrivals at DADES on V7-521 southeast bound and V581 southbound.

2000

GIOVA

tr 050°

VANNI

CATEGORY	A	B	C	D
LNAV MDA	500-1 435 (500-1)	500-1 1/4 435 (500-1 1/4)	500-1 1/2 435 (500-1 1/2)	NA
CIRCLING	660-1 595 (600-1)	660-1 1/2 595 (600-1 1/2)	660-1 1/2 595 (600-1 1/2)	NA

ELEV 65

TDZE 65

MIRL Rwy 1-19 0

REIL Rwy 1 and 19 0

61

0.5% UP

5000 X 75

011° to RW01

SE-3, 21 MAR 2024 to 18 APR 2024

SE-3, 21 MAR 2024 to 18 APR 2024