


LOC I-CNW	APP CRS	Rwy Idg	8600
110.7	174°	TDZE	470
		Apt Elev	470

ILS or LOC RWY 17L
TSTC WACO (CNW)

NA ASR For inop ALS, increase S-ILS 17L Cat E visibility to ¾ SM, and S-LOC 17L Cat E to 1½ SM.		MALSR 	MISSED APPROACH: Climb to 2200 then climbing right turn to 4000 direct ACT VORTAC and hold. (TACAN aircraft continue on ACT VORTAC R-305 to IGORR /ACT 14 DME and hold SE, RT, 305° inbound)	
AWOS-3PT 134.225	WACO APP CON ★ 127.65 227.125	TSTC TOWER ★ 124.0 (CTAF) 255.7	GND CON 121.70	UNICOM 122.95

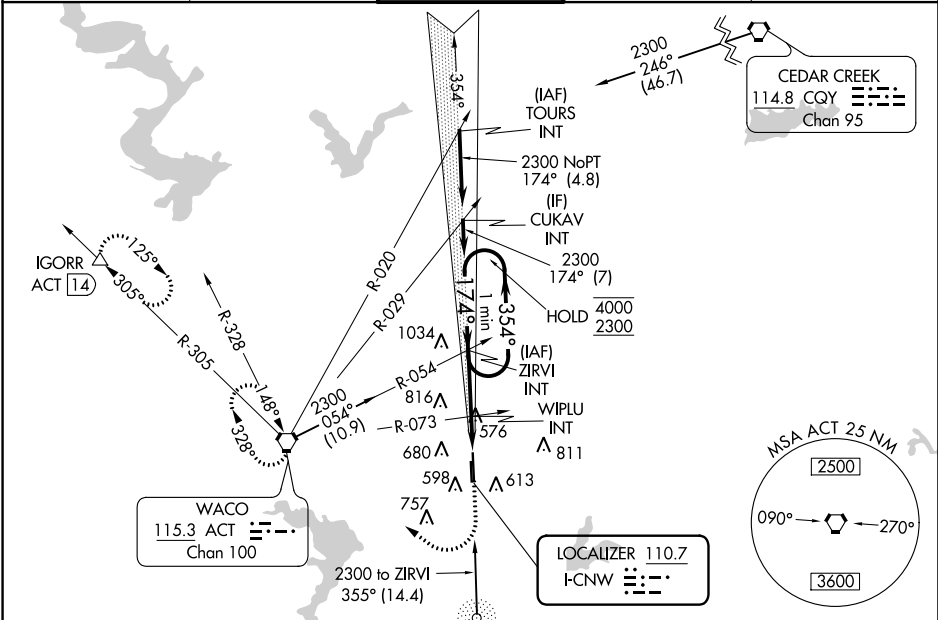

ALTERNATE MISSED APCH FIX ROBINSON 400 ROB		ELEV 470 TDZE 470	
One Minute Holding Pattern		174° 5.6 NM from FAF	
4000 2300		TWR 555	
GS 3.00° TCH 52		MIRL Rwy 17L-35R	
CATEGORY		FAF to MAP 5.6 NM	
S-ILS 17L		Knots	
S-LOC 17L		Min:Sec	
CIRCLING		1:52	