

LOC I-DRT

111.9

Chan 56

APP CRS

132°

Rwy Idg

6000

TDZE

1002

Apt Elev

1002

ILS or LOC RWY 13

DEL RIO INTL (DRT)

NA

NA

Circling NA for Cat D SW of Rwy 13-31. When local altimeter setting not received, use Laughlin AFB altimeter setting and increase all DAs 30 feet, all MDAs 40 feet, increase S-LOC 13 Cat D and Circling Cats C and D visibility ¼ SM. VDP NA when using Laughlin AFB altimeter setting.

MALS

2


2

2

2

MISSED APPROACH: Climb to 2000 via heading 122° then climbing left turn to 4000 direct DLF VORTAC and hold. Continue climb-in-hold to 4000.

ASOS 118.525	DEL RIO APP CON ★ 119.6 259.1	CLNC DEL 120.5	UNICOM 122.8 (CTAF) 1
-----------------	----------------------------------	-------------------	--------------------------

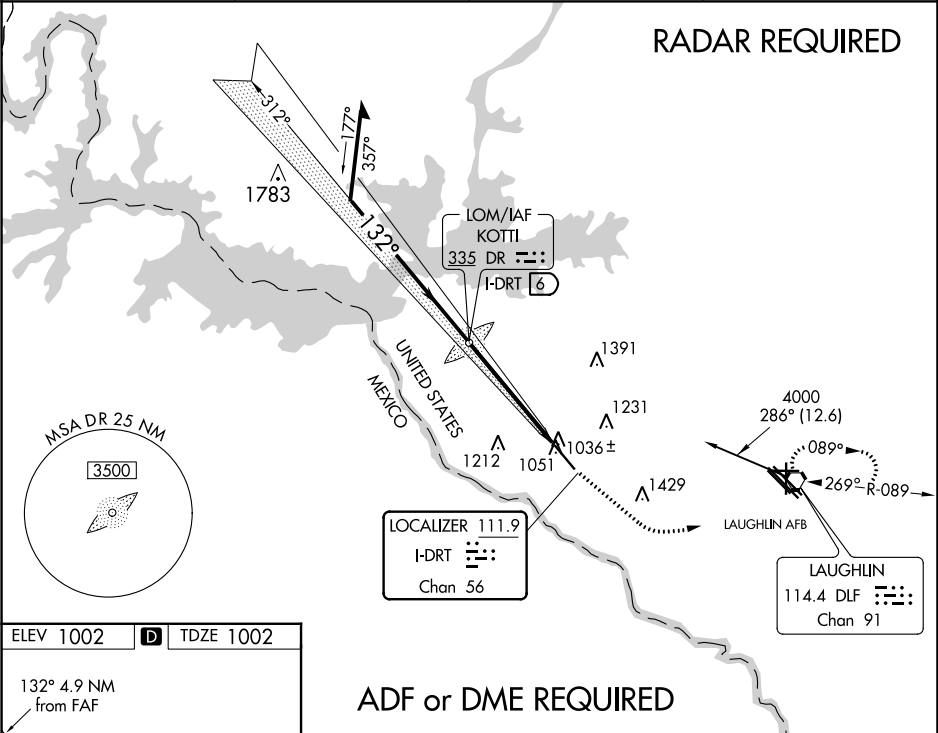

ELEV 1002

D

TDZE 1002

132° 4.9 NM from FAF

REIL Rwy 31 1

HIRL Rwy 13-31 1

FAF to MAP 4.9 NM	Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38	

CATEGORY	A	B	C	D
S-ILS 13	1202-¾ 200 (200-¾)			
S-LOC 13	1420-½ 418 (500-½)	1560-1 558 (600-1)	1420-¾ 418 (500-¾)	1740-2 738 (800-2)
CIRCLING	1440-1 438 (500-1)	1560-1 558 (600-1)	1740-2 738 (800-2)	1740-2¼ 738 (800-2¼)