

WAAS CH 78314 W13A	APP CRS 131°	Rwy Idg 6400 TDZE 1470 Apt Elev 1470
--	------------------------	---

RNAV (GPS) RWY 13

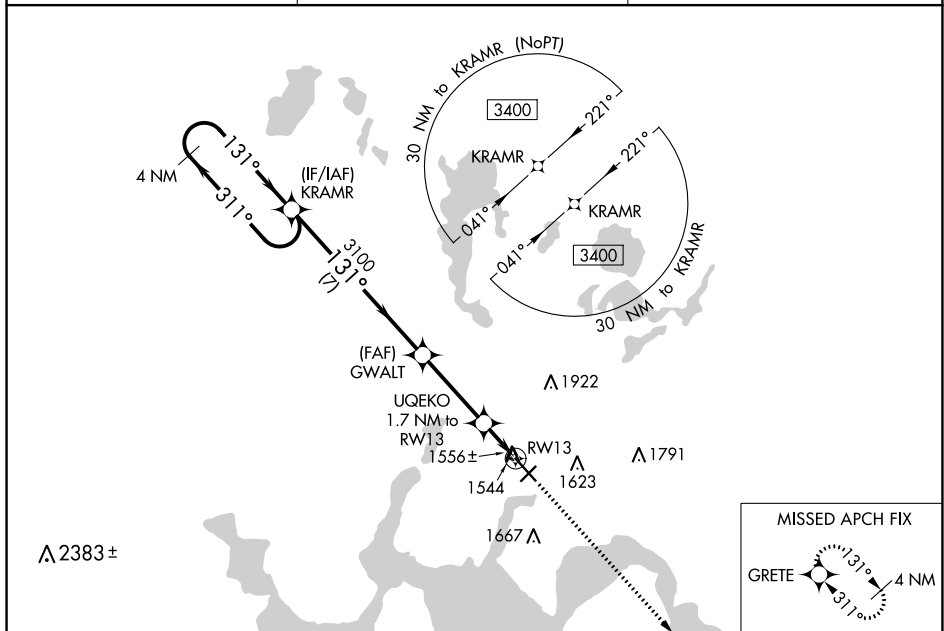
DEVILS LAKE RGNL (DVL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all. Cats visibility ¼ mile, LNAV and Circling Cats C and D visibility ½ mile.

MISSED APPROACH: Climb to 3400 direct GRETE and hold.

AWOS-3PT
125.875

MINNEAPOLIS CENTER
124.2 270.3

UNICOM
122.8 (CTAF) **L**

The diagram illustrates the RW13 approach procedure. It shows a holding pattern at MI 1, followed by a descent from 3400 feet to 3100 feet. The glidepath is defined by a 3.00° TCH 50. Key waypoints include KRAMR, GWALT, UQEKO (1.7 NM to RW13), and RW13 (0.9 NM). A note indicates that VGSIs and RNAV glidepaths are not coincident, with a VGS angle of 3.00/TCH 45. A scale bar shows distances of 7 NM, 3.3 NM, 0.8 NM, and 0.9 NM. A table below the diagram provides category-based altitudes.

CATEGORY	A	B	C	D
LPV DA	1720- ³ / ₄ 250 (300- ³ / ₄)			
RNAV/VNAV DA	1791-1 321 (400-1)			
RNAV MDA	1820-1 350 (400-1)			
C CIRCLING	2000-1 530 (600-1)		2240-2 ¹ / ₄ 770 (800-2 ¹ / ₄)	2240-2 ¹ / ₂ 770 (800-2 ¹ / ₂)