


WAAS CH 93536 W09A	APP CRS 094°	Rwy Idg TDZE 38 Apt Elev 38	4004
--	------------------------	---	-------------

RNAV (GPS) RWY 9

WALLACE-PENDER (ACZ)

RNP APCH - GPS.	▼ NA Rwy 9 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. When local altimeter not received, use Kenansville altimeter setting. Straight-in and Circling Rwy 9 NA at night.	MISSED APPROACH: Climb to 2000 direct EJABI and hold.

AWOS-3P 121.07	WILMINGTON APP CON ★ 135.75 317.425	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

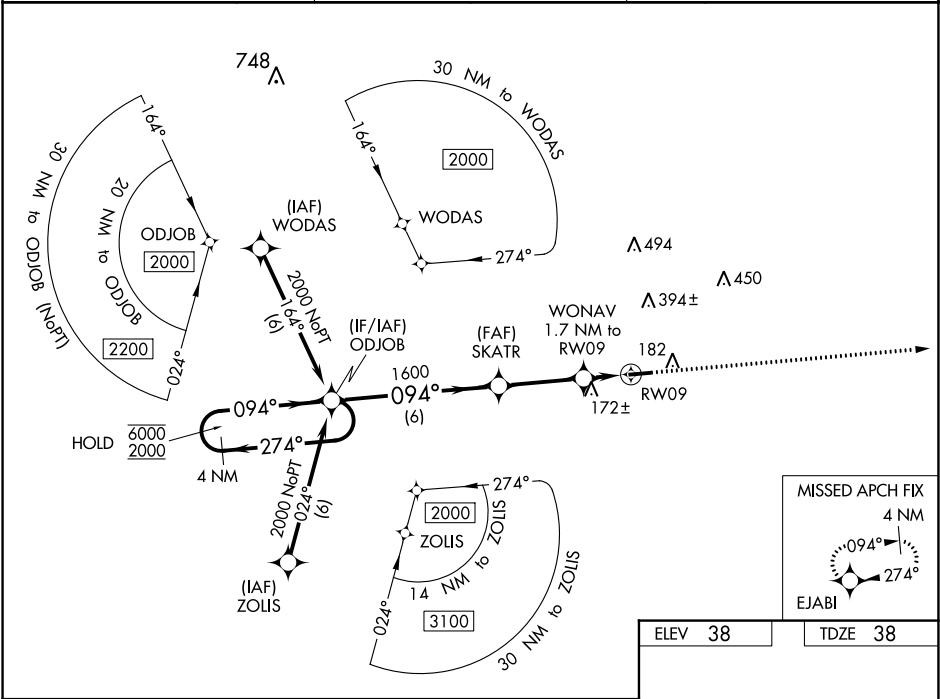

		VGSI and RNAV glidepath not coincident (VGSI Angle 3.10/TCH 40).		2000	EJABI
4 NM Holding Pattern		ODJOB	SKATR	1600	WONAV 1.7 NM to RW09
6000 2000	← 274° 094° →	094°	1600	620	RW09
GP 3.00° TCH 51		6 NM		3.1 NM	1.7 NM
CATEGORY	A	B	C	D	
LPV DA	401-1 363 (400-1)				
LNAV/ VNAV DA	538-1½ 500 (500-1½)				
LNAV MDA	500-1 462 (500-1)		500-1¾ 462 (500-1¾)		
CIRCLING	620-1 582 (600-1)		820-2¼ 782 (800-2¼)		820-2½ 782 (800-2½)

