

WAAS
CH **97434**
W22A

APP CRS
218°

Rwy Idg
TDZE **1378**
Apt Elev **1379**

RNAV (GPS) RWY 22

EL DORADO/CAPT JACK THOMAS MEML (EQA)


▼

⚠ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ½ mile. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH:
Climb to 3000 direct CERVK and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

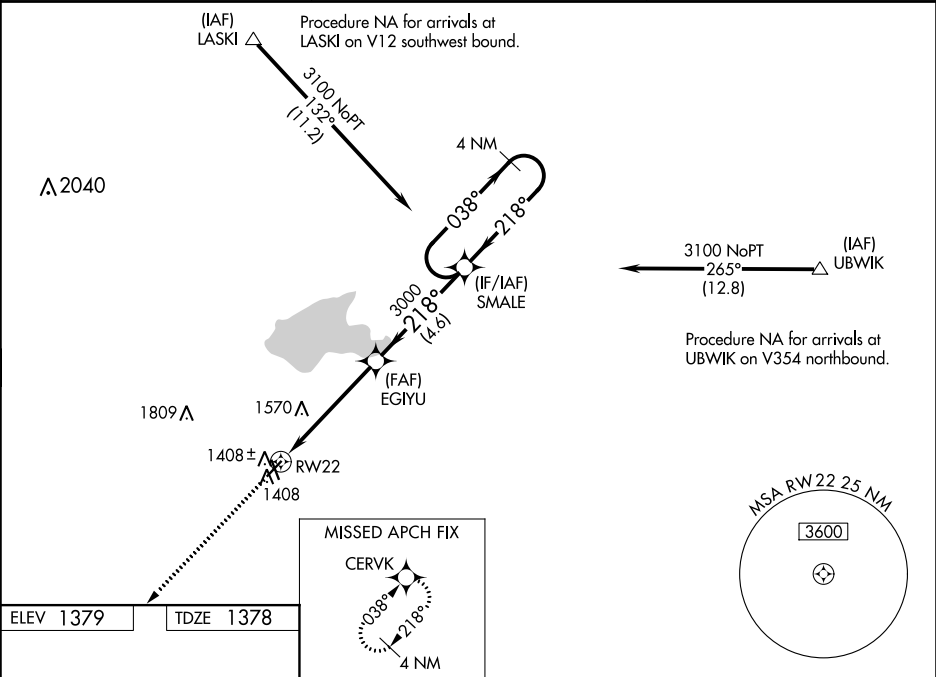

218° to RW22

218° to RW22

4204 X 75

4200 X 75

33

HIRL Rwy 4-22 and 15-33

		3000 ↑ CERVK ✦					
*LNAV only		*1.5 NM to RW22 ↓ RW22 ⤿		EGYU 3000 218° ↗ 3000 ↖		SMALE 4 NM Holding Pattern 038° → 3100 ← GP 3.00° TCH 40	
		1.5 3.5 NM 4.6 NM					
CATEGORY		A		B		C	
LPV DA		1578-1 200 (200-1)				NA	
LNAV/VNAV DA		1671-1 293 (300-1)				NA	
LNAV MDA		1900-1 522 (600-1)				NA	
CIRCLING ✦		1900-1 521 (600-1)		1960-1 581 (600-1)		NA	

NC-2, 18 APR 2024 to 16 MAY 2024

NC-2, 18 APR 2024 to 16 MAY 2024