

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D.

RADIO AIDS TO NAVIGATION: NOTAM FILE ANC.

ANCHORAGE (H) (H) VORV/DME 113.15 TED Chan 78(Y) N61°10.07' W149°57.61' 334° 1.1 NM to fld. 92/18E.

VOR unusable:

- 041°-091° byd 25 NM blo 15,000'
- 091°-096° byd 20 NM blo 15,000'
- 096°-121° byd 25 NM blo 12,500'
- 121°-146° byd 25 NM blo 9,000'

DME unusable:

- 041°-091° byd 25 NM blo 15,000'
- 091°-096° byd 20 NM blo 15,000'
- 096°-121° byd 25 NM blo 12,500'
- 121°-146° byd 25 NM blo 9,000'
- 196°-206° byd 25 NM blo 3,500'
- 206°-211° byd 25 NM blo 4,000'
- 211°-221° byd 25 NM blo 3,500'

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737.

WATERWAY E-W: 4541X188 (WATER)

WATERWAY N-S: 1930X200 (WATER)

WATERWAY SE-NW: 1369X150 (WATER)

SEAPLANE REMARKS: All waterlanes elev 76'. North pothole designated no-wake area to protect moored acft/shoreline. Lake clsd to acft over 12,500 lbs from freeze up til approximately Dec 31, overflows into ice may occur winter months. For availability of winter ski ops on lake sfcs, consult local NOTAMS and ctc twr prior to arrival/departure. Floating debris on lake.

MERRILL FLD (MRI)(PAMR) 2 E UTC-9(-8DT) N61°12.81' W149°50.68'

ANCHORAGE  
H-1B, 2K, L-1A, 3D, 4G  
IAP, AD

143 B TPA—See Remarks LRA NOTAM FILE MRI

RWY 07-25: H4000X100 (ASPH) S-50, D-80 MIRL 0.3% up E

RWY 07: REIL. VASI(V2L)—GA 3.75° TCH 43'. Pole. Rgt tfc.

RWY 25: REIL. VASI(V2L)—GA 3.0° TCH 21'. Bldg.

RWY 16-34: H2640X75 (ASPH) S-20 MIRL 0.3% up N

RWY 16: REIL. VASI(V2R)—GA 3.0° TCH 22'. Bldg. Rgt tfc.

RWY 34: REIL. PAPI(P2L)—GA 3.0° TCH 21'. Bldg.

RWY 05-23: H2000X60 (ASPH-GRVL)

RWY 05: Tree.

RWY 23: Road.

SERVICE: S4 FUEL 100, JET A OX 2, 4 LGT Actvt REIL Rwy 07, 25; 16 and 34; MIRL Rwy 07-25 and 16-34—CTAF. PAPI Rwy 34; VASI Rwy 07, 16 and 25 operate 24 hrs.

NOISE: Noise abatement, no touch and go flight ops or pattern work btn 0700-1600Z±.

AIRPORT REMARKS: Special Air Traffic Rules—Part 93, see Regulatory Notices. Attended Mon-Fri 1630-0230Z±. Rwy 05-23 paved first 60 ft remaining sfc composition is gravel and used seasonally as a snow runway. Recommended ski equip acft use to minimize wheel rutting. Helipad locid 20K. Rwy 05 paved first 60 ft. 1-8 ft snow berms adj to rwys and twys durg winter. Birds & seagulls on & invof arpt. Acft in nonmovement area must ctc gnd ctl prior to taxi. All rwy and twy lgts nonstd height. Portions of Twy C btn Twy S and Twy N, and portions of Twy Q not vis fm twr. Twy B south of Twy M, Twy G btn Twy N and Rwy 05-23, Twy Q east of Twy C and all sfcs south of Rwy 05-23 uncontrolled. PPR for acft ovr 12,500 lb. TPA for acft 105 kts or less 900' MSL, acft greater than 105 kts 1,200' MSL. Compass rose avbl with prior cden fm Merrill Fld ATCT. Overflight of arpt bldgs, fuel pumps, personnel, and/or parked acft is prohibited blw 300 ft AGL. Arr/Dep Routes—See Area Notices; Spl Notice Cartee Asp. See separate listing for hosp heliport.

AIRPORT MANAGER: 907-343-6303

WEATHER DATA SOURCES: ASOS 124.25 (907) 271-5277. (WX CAM)

COMMUNICATIONS: CTAF 126.0 UNICOM 122.95 ATIS 124.25


RCO 122.2 (KENAI RADIO)

RCO 122.55 122.3 (KENAI RADIO)

Ⓡ ANCHORAGE APP/DEP CON 363.2 119.1

TOWER 126.0 127.55 (1600-0700Z±) GND CON 121.7

AIRSPACE: CLASS D svc 1600-0700Z±; other times CLASS E..

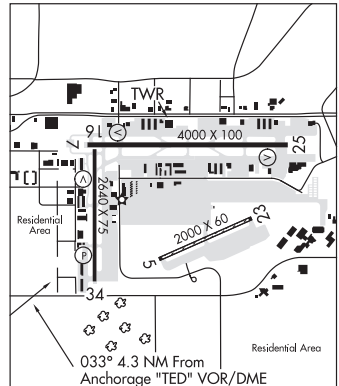

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

VOR TEST FACILITY (VOT) 111.0

RADIO AIDS TO NAVIGATION: NOTAM FILE ANC.

ANCHORAGE (H) (H) VORW/DME 113.15 TED Chan 78(Y) N61°10.07' W149°57.61' 033° 4.3 NM to fld. 92/18E.

VOR unusable:

- 041°-091° byd 25 NM blo 15,000'
- 091°-096° byd 20 NM blo 15,000'
- 096°-121° byd 25 NM blo 12,500'
- 121°-146° byd 25 NM blo 9,000'

DME unusable:

- 041°-091° byd 25 NM blo 15,000'
- 091°-096° byd 20 NM blo 15,000'
- 096°-121° byd 25 NM blo 12,500'
- 121°-146° byd 25 NM blo 9,000'
- 196°-206° byd 25 NM blo 3,500'
- 206°-211° byd 25 NM blo 4,000'
- 211°-221° byd 25 NM blo 3,500'

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737. FM radio interference may be received on twr freqs in tfc patterns. When ATCT clsd ctc Merrill wx - CTAF or 271-4355. When twr clsd CTAF procedures are recommended. See Regulatory Notices Anchorage Terminal Area Merrill Segment this supplement. Flt planning in Anchorage Bowl Area (RCO) 122.55.

PROVIDENCE HOSPITAL HELIPORT (AK38) PVT 3 SE UTC-9(-8DT) N61°11.34' W149°49.31' ANCHORAGE

140 NOTAM FILE Not insp.

HELIPAD H1: H60X60 (ASPH) MIRL

SERVICE: LGT H1 flood lights.

HELIPORT REMARKS: Attended 24 hrs. Special Air Traffic Rules-Part 93 see Regulatory Notices. Heliport within Merrill Class D airspace, ctc Merrill twr freq 126.0. Be Alert; Hospital helicopter base on rooftop. Apch or departure NW or SE along Providence Drive. PPR for ldg helicopters, contact Lifeguard base telephone 907-261-3071 or 800-478-5433 15 minutes prior to arrival.

AIRPORT MANAGER: 907-212-2350

COMMUNICATIONS: CTAF 126.0

RADIO AIDS TO NAVIGATION: NOTAM FILE ANC.

ANCHORAGE (H) (H) VORW/DME 113.15 TED Chan 78(Y) N61°10.07' W149°57.61' 054° 4.2 NM to fld. 92/18E.


VOR unusable:

- 041°-091° byd 25 NM blo 15,000'
- 091°-096° byd 20 NM blo 15,000'
- 096°-121° byd 25 NM blo 12,500'
- 121°-146° byd 25 NM blo 9,000'

DME unusable:

- 041°-091° byd 25 NM blo 15,000'
- 091°-096° byd 20 NM blo 15,000'
- 096°-121° byd 25 NM blo 12,500'
- 121°-146° byd 25 NM blo 9,000'
- 196°-206° byd 25 NM blo 3,500'
- 206°-211° byd 25 NM blo 4,000'
- 211°-221° byd 25 NM blo 3,500'

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737. Wx avbl on Merrill ATIS 124.25 or ctc FSS. Anchorage wx camera avbl on internet at <http://avcams.faa.gov>.

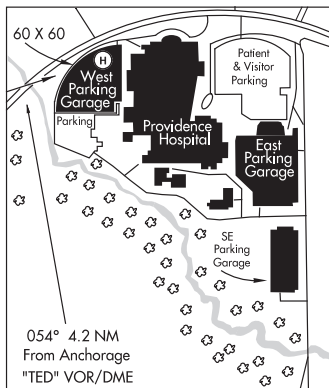

SIXMILE LAKE (AA06) PVT 2 NE UTC-9(-8DT) N61°17.38' W149°48.37' ANCHORAGE

85 NOTAM FILE Not insp.

RWY 06-24: 1600X35 (GRVL)

AIRPORT REMARKS: Unattended.

AIRPORT MANAGER: 907-552-2107

COMMUNICATIONS: CTAF 122.9

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737.

WATERWAY 07W-25W: 4000X50 (WATER)

SEAPLANE REMARKS: Unattended.