


| | | |
|---------------------------|------------------------|--|
| LOC I-GPI 111.5 | APP CRS 020° | Rwy ldg TDZE Apt Elev 9007 2966 2977 |
|---------------------------|------------------------|--|

ILS or LOC RWY 2

GLACIER PARK INTL (GPI)



| | | | | |
|---|--|--|--|-------------------------|
| DME required. RNAV 1-GPS or RADAR required for procedure entry. | | MALSR | MISSED APPROACH: Climb to 4100 then climbing left turn to 12000 on heading 190° and FCA VOR/DME R-238 to KILLY/15.7 DME and hold, continue climb-in-hold to 12000. | |
| Inop table does not apply to S-LOC 2 Cats C/D. | | | | |
| -15°C | | | | |
| ATIS 132.625 | SALT LAKE CENTER 127.075 244.875 | GLACIER TOWER* 124.55 (CTAF) 0 | GND CON 121.6 | UNICOM 122.95 |

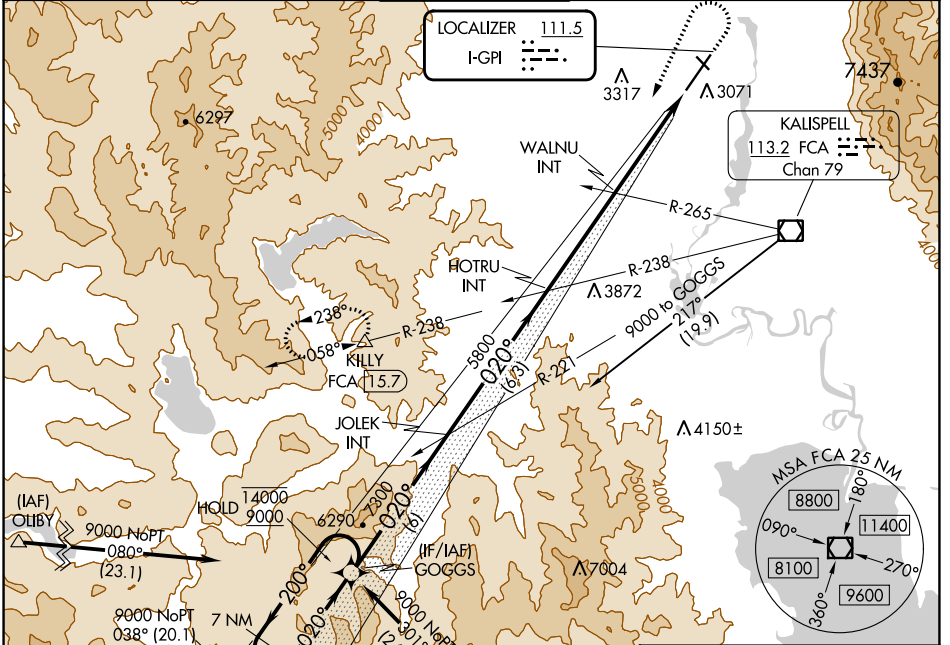

NW-1, 16 MAY 2024 to 13 JUN 2024

NW-1, 16 MAY 2024 to 13 JUN 2024

| | |
|-----------|--------------------|
| ELEV 2977 | D TDZE 2966 |
|-----------|--------------------|

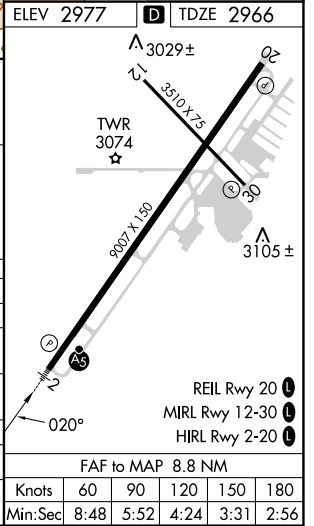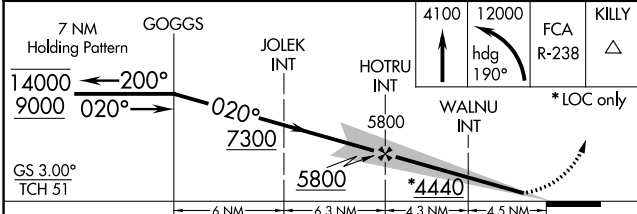

| CATEGORY | A | B | C | D |
|--|---------------------------------|---------------------------------|-----------------------------|-------------------------------|
| S-ILS 2 | 3166-1/2 200 (200-1/2) | | | |
| S-LOC 2 | 4440-3/4 1474 (1500-3/4) | 4440-1 1474 (1500-1) | 4440-3 | 1474 (1500-3) |
| C CIRCLING | 4440-1 1/4 1463 (1500-1 1/4) | 4440-1 1/2 1463 (1500-1 1/2) | 4440-3 | 1463 (1500-3) |
| WALNU FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) | | | | |
| S-LOC 2 | 3520-1/2 | 554 (600-1/2) | 3520-1 1/8 | 554 (600-1 1/8) |
| C CIRCLING | 3520-1 543 (600-1) | 3580-1 603 (700-1) | 3640-1 3/4 663 (700-3/4) | 3760-2 1/2 783 (800-2 1/2) |

| | | | | | |
|-------------------|------|------|------|------|------|
| FAF to MAP 8.8 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 8:48 | 5:52 | 4:24 | 3:31 | 2:56 |