


|                           |                        |                        |
|---------------------------|------------------------|------------------------|
| LOC I-TTN<br><b>111.3</b> | APP CRS<br><b>058°</b> | Rwy Idg<br><b>6006</b> |
|                           |                        | TDZE<br><b>186</b>     |
|                           |                        | Apt Elev<br><b>213</b> |

# ILS or LOC RWY 6

TRENTON MERCER (TTN)


|   |                     |   |
|---|---------------------|---|
| <p><b>▼</b> When Circling to Rwy 34 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For inop ALS, increase EMUNY fix minimums S-LOC 6 Cat C/D visibility to 1 SM.</p> <p><b>▲</b></p> | <p><b>MALSR</b></p> | <p><b>MISSED APPROACH:</b> Climb to 1500 then climbing left turn to 2700 direct ARD VOR/DME and hold.</p> |
|---|---------------------|---|

|                        |  |  |                               |                                |                         |
|------------------------|--|--|-------------------------------|--------------------------------|-------------------------|
| ATIS<br><b>126.775</b> | PHILADELPHIA APP CON<br><b>123.8 291.7</b> | TRENTON TOWER ★<br><b>120.7 (CTAF) 0 257.8</b> | GND CON<br><b>121.9 257.8</b> | CLNC DEL<br><b>121.9 257.8</b> | UNICOM<br><b>122.95</b> |
|------------------------|--|--|-------------------------------|--------------------------------|-------------------------|

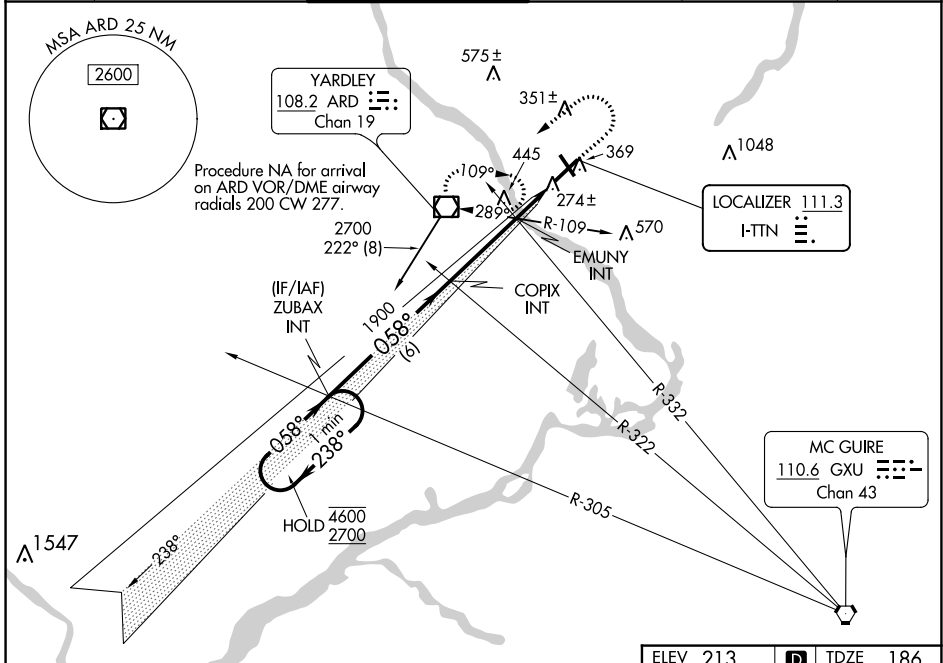

NE-2, 16 MAY 2024 to 13 JUN 2024

NE-2, 16 MAY 2024 to 13 JUN 2024

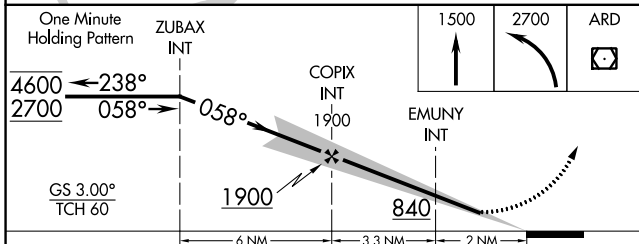

|          |   |          |
|----------|---|----------|
| ELEV 213 | D | TDZE 186 |
|----------|---|----------|

TWR 276

4600 X 150

6005 Y 150

0.52 UP

0.58 UP

058°

HIRL Rwys 6-24 and 16-34

REIL Rwys 16, 24 and 34

FAF to MAP 5.3 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:18 | 3:32 | 2:39 | 2:07 | 1:46 |

| CATEGORY   | A                 | B           | C            | D             |
|--|-------------------|-------------|--------------|---------------|
| S-ILS 6  | 414-½ 228 (300-½) |             |              |               |
| S-LOC 6  | 840-½             | 654 (700-½) | 840-1¾       | 654 (700-1¾)  |
| <b>C</b> CIRCLING                                | 840-1             | 627 (700-1) | 840-1¾       | 960-2½        |
| EMUNY FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) |                   |             |              |               |
| S-LOC 6  | 540-½             | 354 (400-½) | 540-5/8      | 354 (400-5/8) |
| <b>C</b> CIRCLING                                | 680-1             | 467 (500-1) | 760-1½       | 960-2½        |
|  |                   |             | 547 (600-1½) | 747 (800-2½)  |