RNAV (GPS) RWY 13

ROCHESTER INTL (RST)

WAAS	APP CRS	Rwy Idg	9033
CH 90202 W13A	133°	TDZE	1280
		Apt Elev	1317

RNP APCH - GPS.

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 2900 direct POKYI and on track 241° to RST VOR/DME and hold.

ATIS	ROCHESTER APP CON★	ROCHESTER TOWER★	GND CON	UNICOM
120.5	119.8 251.125	118.3 (CTAF) L 257.8	121.9	122.95

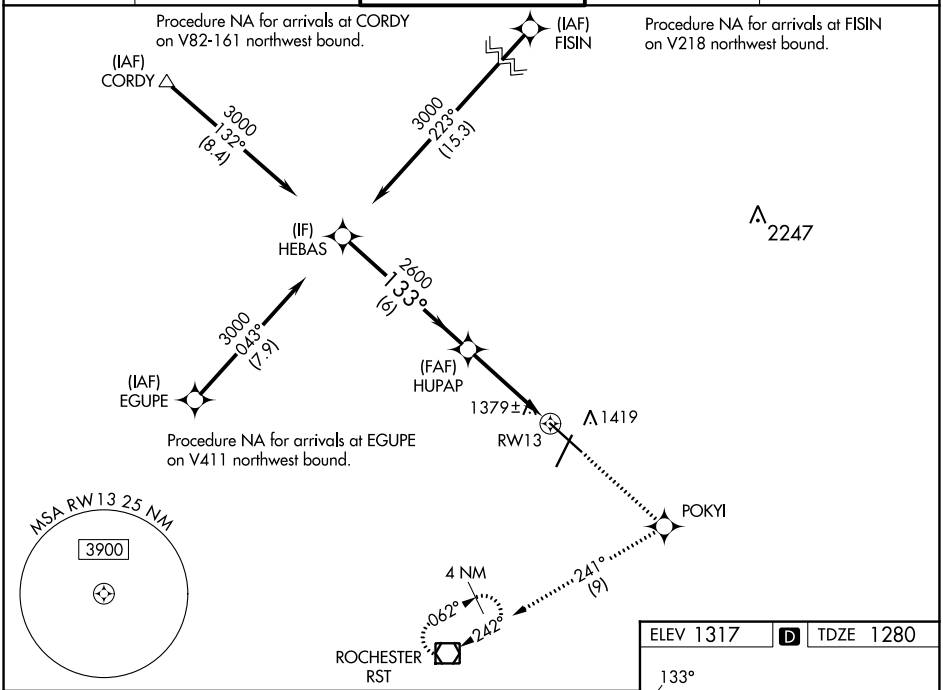

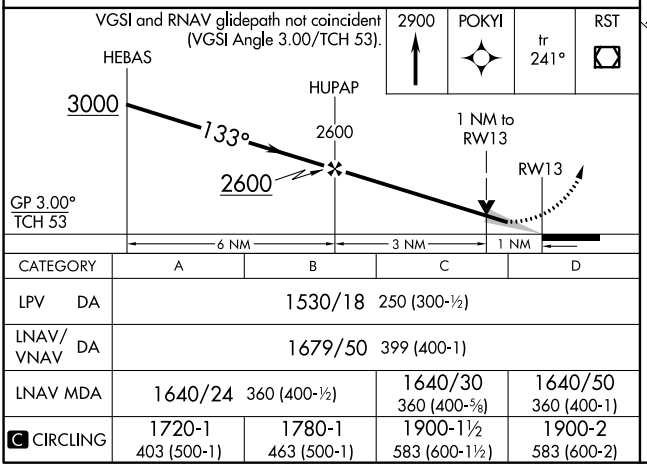

CATEGORY	A	B	C	D
LPV DA	1530/18 250 (300-½)			
LNAV/VNAV DA	1679/50 399 (400-1)			
LNAV MDA	1640/24 360 (400-½)		1640/30 360 (400-⅝)	1640/50 360 (400-1)
C CIRCLING	1720-1 403 (500-1)	1780-1 463 (500-1)	1900-1½ 583 (600-1½)	1900-2 583 (600-2)

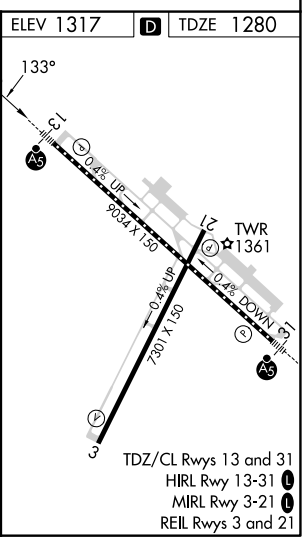

NC-1, 16 MAY 2024 to 13 JUN 2024
NC-1, 16 MAY 2024 to 13 JUN 2024