


# GTLKE FOUR DEPARTURE (RNAV)


(NARRATIVE ON FOLLOWING PAGE)

ATIS 125.25  
CLNC DEL 339.8  
121.9 (when tower closed)  
GND CON 121.9 339.8  
LAKEFRONT TOWER \* 124.3 (CTAF) 339.8  
CLEVELAND DEP CON 125.35 346.325

**TAKEOFF MINIMUMS:**  
Rwys 6L/R, 24R: Standard with a minimum climb of 500' per NM to 1100.  
Rwy 24L: 400-1% or standard with a minimum climb of 757' per NM to 1000.

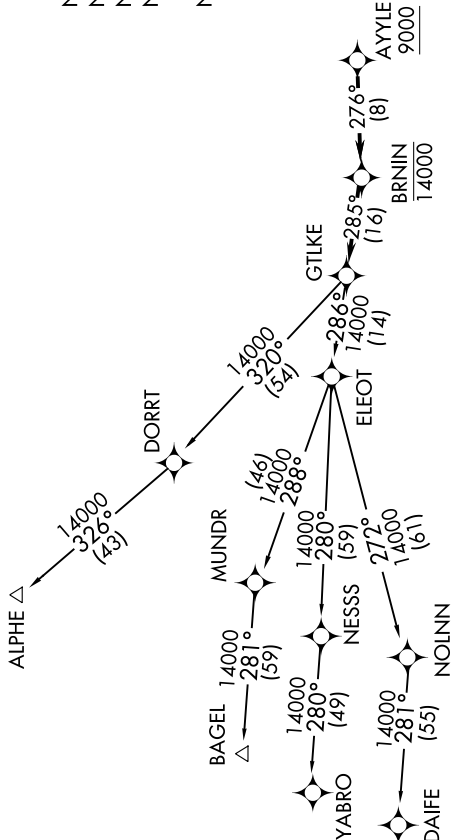

- NOTE: RADAR required.
- NOTE: RNAV 1.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: BAGEL TRANSITION: For aircraft landing MDW only, or as assigned by ATC.
- NOTE: DAIFE TRANSITION: For aircraft landing ORD only, or as assigned by ATC.



**TOP ALTITUDE:  
ASSIGNED BY ATC**

NOTE: Chart not to scale.

# GTLKE FOUR DEPARTURE (RNAV)