


LOC/DME I-VGU	APP CRS	Rwy Idg	9001
111.9	131°	TDZE	922
Chan 56		Apt Elev	958


ILS or LOC RWY 13
DES MOINES INTL (DSM)

V DME required. For inop ALS, increase S-LOC 13 Cots C/D visibility to RVR 4500. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR A5	MISSED APPROACH: Climb to 1600 then climbing right turn to 3000 direct DSM VORTAC then on DSM VORTAC R-254 to MIDDLE INT/DSM 12 DME and hold.
---	-------------------------------	--

ATIS 119.55	DES MOINES APP CON 123.9 307.15	DES MOINES TOWER 118.3 257.8	GND CON 121.9 348.6	CLNC DEL 134.15 317.55
----------------	------------------------------------	---------------------------------	------------------------	---------------------------

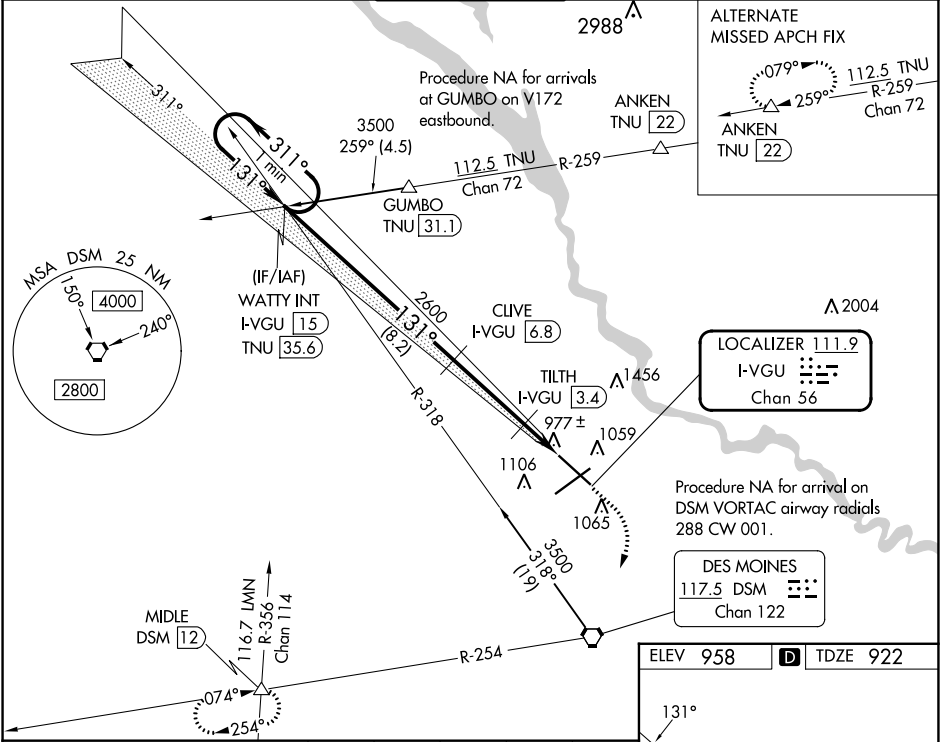

One Minute Holding Pattern		WATTY INT I-VGU 15	CLIVE I-VGU 6.8	TILTH I-VGU 3.4	*LOC only
3500 ← 311° / 131° → 2600		GS 3.00° TCH 56	8.2 NM	3.4 NM	0.9 NM
CATEGORY	A	B	C	D	
S-ILS 13#	1122/24 200 (200-½)				
S-LOC 13	1240/24 318 (300-½)				
C CIRCLING	1420-1	462 (500-1)	1600-1¾ 642 (700-1¾)	1760-2½ 802 (900-2½)	

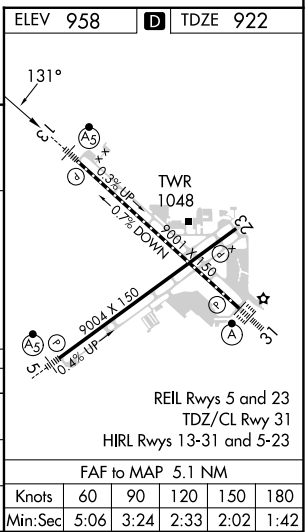

NC-3, 13 JUN 2024 to 11 JUL 2024

NC-3, 13 JUN 2024 to 11 JUL 2024