RNAV (RNP) U RWY 22R

DETROIT METRO WAYNE COUNTY (DTW)

APP CRS	Rwy ldg	10000
213°	TDZE	642
	Apt Elev	645

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct DOHNT and hold.

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	124.05 284.0	135.0 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	120.65	

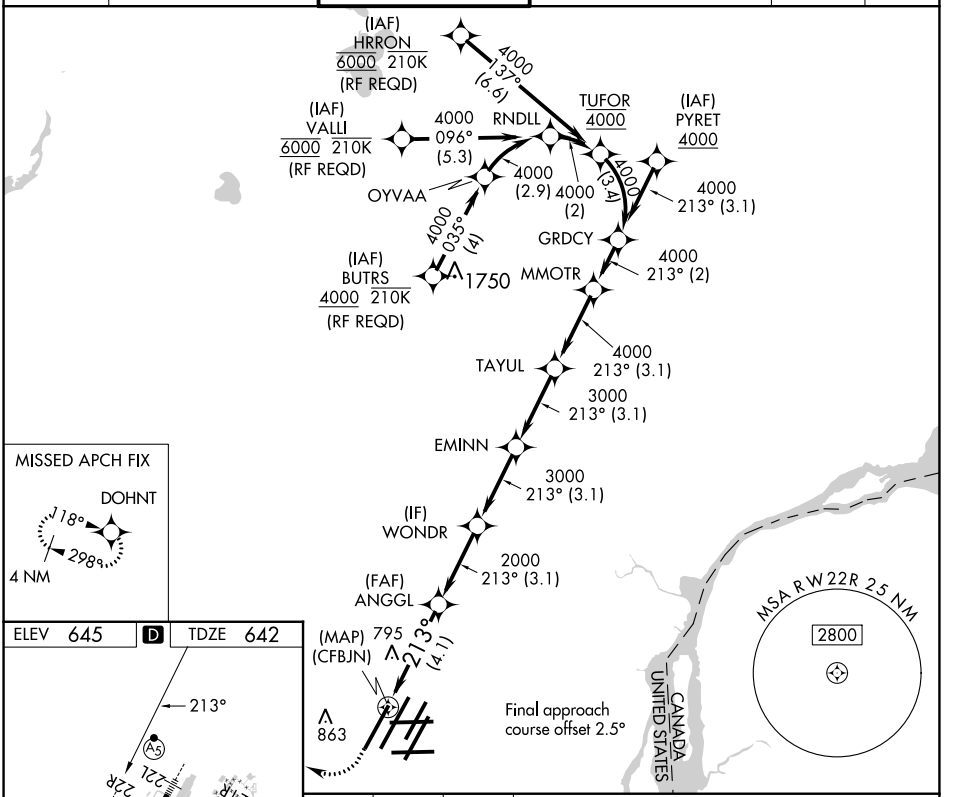

ELEV 645 D TDZE 642



TDZ/CL Rwys 3R, 4L, 4R and 22R
HIRL all runways
REIL Rwys 3L, 9L and 21R

1100 | 4000 | DOHNT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

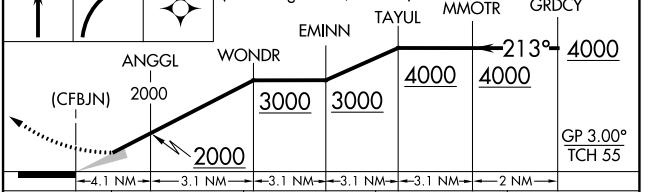

CATEGORY	A	B	C	D
RNP 0.30 DA	987/30	345 (400-5/8)		

AUTHORIZATION REQUIRED

EC-1, 13 JUN 2024 to 11 JUL 2024
EC-1, 13 JUN 2024 to 11 JUL 2024