LOC/DME I-LIT	APP CRS	Rwy Idg	7976
110.3	047°	TDZE	258
Chan 40		Apt Elev	266

ILS or LOC RWY 4L

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

T A Simultaneous approach authorized. Rwy 4L helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to S-ILS 4L all Cats. LOC minimums: For inop ALS, increase S-LOC 4L Cats A/B visibility to 1 SM and Cats C/D visibility to 2 SM. JIRUR fix minimums: For inop ALS, increase S-LOC 4L Cats A/B visibility to 1 SM and Cats C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 on heading 260° and on LIT VORTAC R-303 to ROLAN INT/LIT 16.7 DME and hold.

D-ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 353.6	118.7 257.8	121.9 339.8	118.95

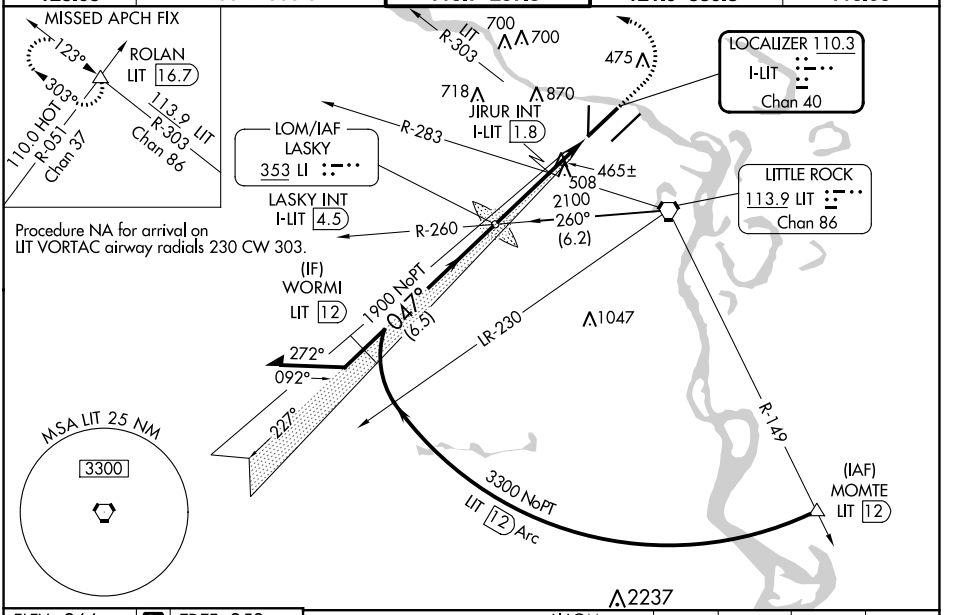

ELEV 266 D TDZE 258



MIRL Rwy 18-36
HIRL Rwys 4R-22L and 4L-22R
TDZ/CL Rwy 22R

FAF to MAP 4.7 NM					
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

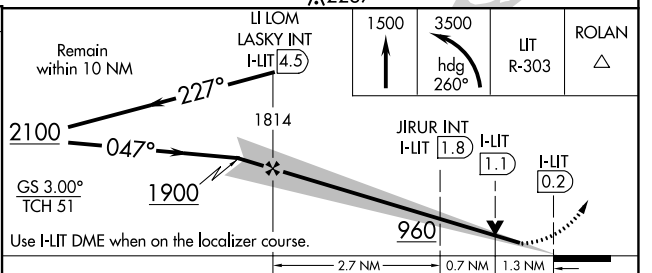

CATEGORY	A	B	C	D
S-ILS 4L	508/40 250 (300-¾)			
S-LOC 4L	960/40 702 (700-¾)		960-1⅝ 702 (700-1⅝)	
C CIRCLING	960-1 694 (700-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)	1180-3 914 (1000-3)
JIRUR FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 4L	720/40 462 (500-¾)		720/50 462 (500-1)	
C CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)	1180-3 914 (1000-3)

SC-1, 13 JUN 2024 to 11 JUL 2024
SC-1, 13 JUN 2024 to 11 JUL 2024