ILS or LOC RWY 18L

MEMPHIS INTL (MEM)

LOC/DME I-EXS	APP CRS	Rwy Idg	9000
111.15	180°	TDZE	301
Chan 48 (Y)		Apt Elev	341

T A Simultaneous approach authorized. DME or RADAR required. For inop ALS, increase S-ILS 18L Cat E visibility to RVR 4000, S-LOC 18L Cat E visibility to 1 ¾ SM, BRYSN fix minimums, increase S-LOC 18L Cats D and E visibility to RVR 5000.

MALSR

MISSED APPROACH: Climb to 900 then climbing left turn to 5000 on MEM VORTAC R-151 to KEEZE INT/MEM 10.4 DME and hold, continue climb-in-hold to 5000.

MEMPHIS APP CON		MEMPHIS TOWER		GND CON	
119.1 291.6	(176°-355°)	(Rwy 9-27)	118.3 257.8	(Rwy 9-27)	121.0 379.2
125.8 338.3	(356°-175°)	(Rwys 18C-36C, 18L-36R)	119.7 257.8	(Rwys 18C-36C, 18L-36R)	121.9 379.2
		(Rwy 18R-36L)	128.425 257.8	(Rwy 18R-36L)	121.65 379.2

D-ATIS 127.75

CLNC DEL 125.2 CPDLC

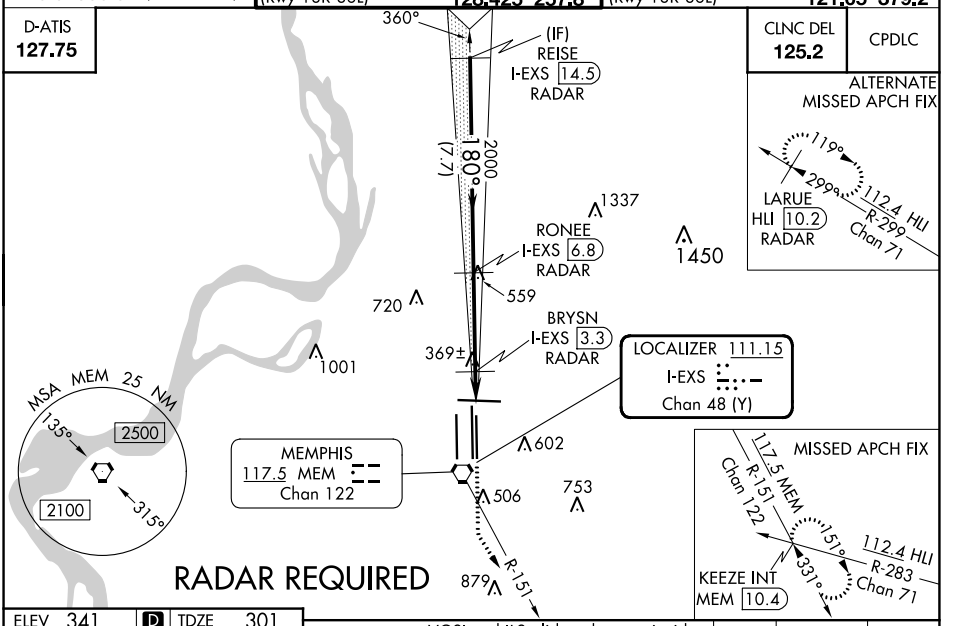

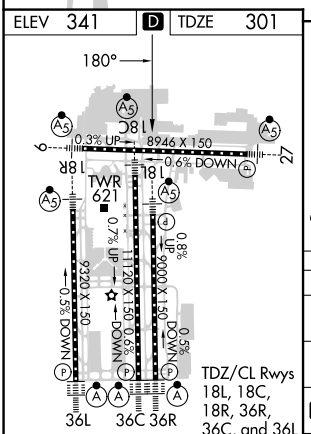

FAF to MAP 5.2 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

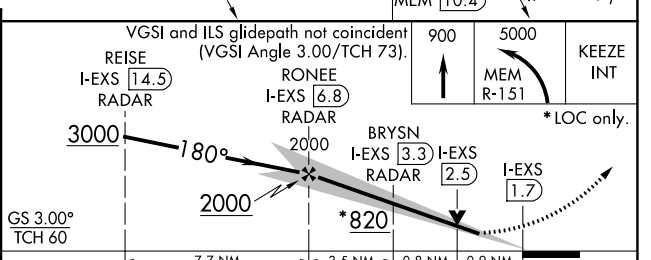

CATEGORY	A	B	C	D	E
S-ILS 18L	501/18 200 (200-½)				501/24 200 (200-½)
S-LOC 18L	820/24 519 (500-½)		820/50 519 (500-1)	820/60 519 (500-1¼)	
C CIRCLING	940-1 599 (600-1)		940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)
BRYSN FIX MINIMUMS					
S-LOC 18L	620/24 319 (300-½)			620/40 319 (300-¾)	
C CIRCLING	940-1 599 (600-1)		940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)

SE-1, 13 JUN 2024 to 11 JUL 2024
SE-1, 13 JUN 2024 to 11 JUL 2024