

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| LOC/DME I-BAO<br><b>111.5</b><br>Chan 52 | APP CRS<br><b>326°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>6109</b><br><b>704</b><br><b>705</b> |
|--|------------------------|-----------------------------|---|

# ILS or LOC RWY 32


ST PAUL DOWNTOWN HOLMAN FLD (STP)

DME or RADAR required. RADAR required for procedure entry.


**⚠** Rwy 32 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to S-ILS 32 all Cats and S-LOC all Cats. HOVIN FIX MINIMUMS: Inop table does not apply to Cats A/B. For inop ALS, increase Cats C/D visibility to 1 1/2 SM.

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 on heading 010° and MSP R-037 to WHISK INT/MSP 18.7 DME/RADAR and hold.

|                       |  |   |                           |                            |                         |
|-----------------------|--|---|---------------------------|----------------------------|-------------------------|
| ATIS<br><b>118.35</b> | MINNEAPOLIS APP CON<br><b>121.2 335.65</b> | ST. PAUL TOWER *<br><b>119.1 (CTAF) 0 257.8</b> | GND CON<br><b>121.675</b> | CLNC DEL<br><b>121.675</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--|---|---------------------------|----------------------------|-------------------------|

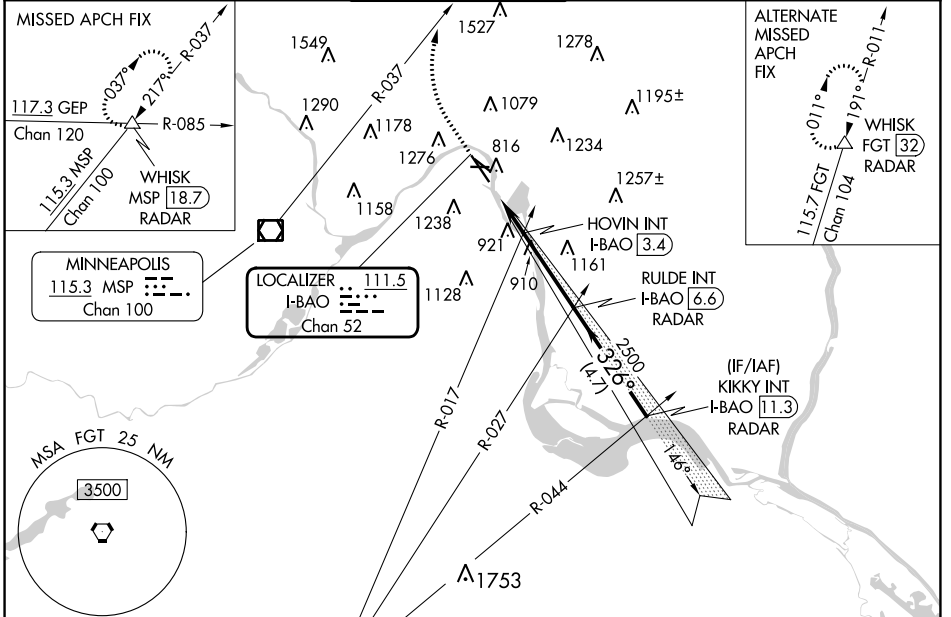

|          |          |          |
|----------|----------|----------|
| ELEV 705 | <b>D</b> | TDZE 704 |
|----------|----------|----------|

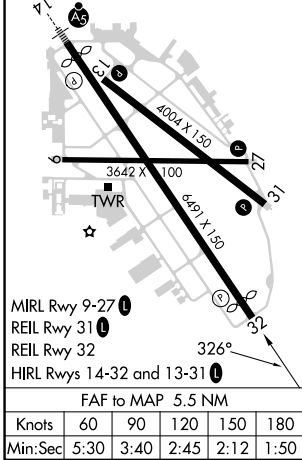

|                    |                        |                            |              |                             |                              |
|--------------------|------------------------|----------------------------|--------------|-----------------------------|------------------------------|
| 1300               | 4000                   | MSP R-037                  | WHISK        | RULDE INT I-BAO [6.6] RADAR | KIKKY INT I-BAO [11.3] RADAR |
| *LOC only          |                        | I-BAO [1.1]                | *I-BAO [2.6] | HOVIN INT I-BAO [3.4]       | 2500                         |
|                    |                        | 1460*                      | 326°         | 2500                        | GS 3.00° TCH 40              |
|                    |                        | 1.5 NM                     | 0.8 NM       | 3.2 NM                      | 4.7 NM                       |
| CATEGORY           | A                      |                            | B            | C                           | D                            |
| S-ILS 32           | 1011/50 307 (400-1)    |                            |              |                             |                              |
| S-LOC 32           | 1460/55<br>756 (800-1) | 1460/60<br>756 (800-1 1/4) | 1460-2       | 756 (800-2)                 |                              |
| <b>C</b> CIRCLING  | 1580-1 1/4             | 875 (900-1 1/4)            | 1580-2 1/2   | 875 (900-2 1/2)             |                              |
| HOVIN FIX MINIMUMS |                        |                            |              |                             |                              |
| S-LOC 32           | 1220/55                | 516 (600-1)                | 1220-1 1/4   | 516 (600-1 1/4)             |                              |
| <b>C</b> CIRCLING  | 1580-1 1/4             | 875 (900-1 1/4)            | 1580-2 1/2   | 875 (900-2 3/4)             |                              |

NC-1, 13 JUN 2024 to 11 JUL 2024

NC-1, 13 JUN 2024 to 11 JUL 2024