ILS or LOC RWY 27R
PHILADELPHIA INTL (PHL)

LOC/DME I-PDP	APP CRS	Rwy ldg	27R	27L
108.95	268°	TDZE	8864	9912
Chan 26 (Y)		Apt Elev	11	10
			36	36

DME required.

For inop ALS, increase S-LOC 27R Cat C/D visibility to 1⅜ SM.
**RVR 1800 authorized with the use of FD or AP or HUD to DA.

27R MALSR (A5) 27L MALSR (A5)

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on MXE VORTAC R-115 to MXE VORTAC and hold.

D-ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON	CLNC DEL
ARR 133.4 DEP 135.925	124.35 319.15	118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35) 135.1 327.05 (Rwy 9R/27L)	121.9 348.6	118.85 348.6

CPDLC

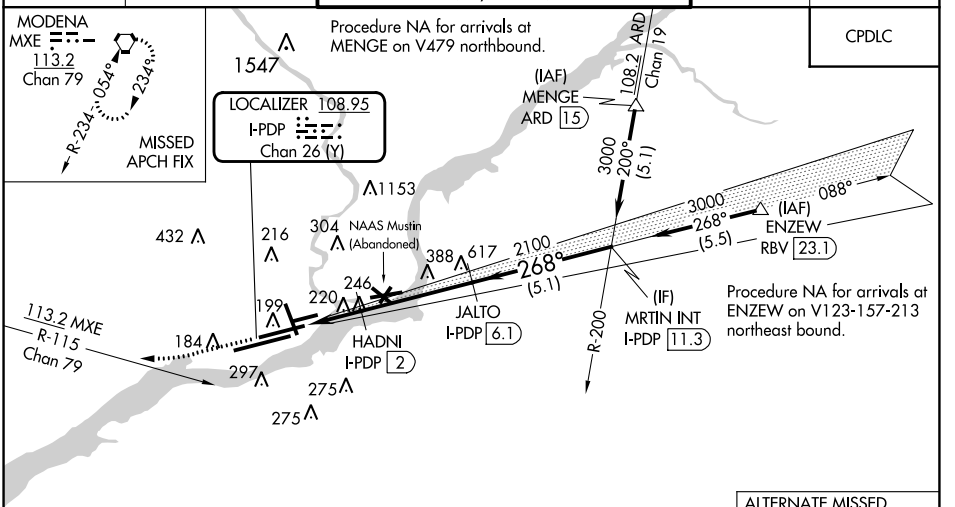

ELEV	36	D	TDZE 27R	11
			TDZE 27L	10

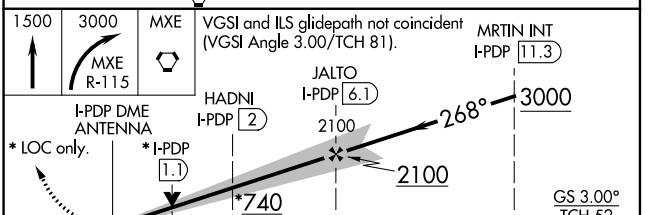



CATEGORY	A	B	C	D
S-ILS 27R **	211/24 200 (200-½)			
S-LOC 27R	500/24 489 (500-½)		500/50 489 (500-1)	
SIDESTEP 27L	500-1 491 (500-1)		500-1⅜ 491 (500-1⅜)	
CIRCLING	540-1 504 (600-1)	600-1 564 (600-1)	620-1½ 584 (600-1½)	720-2¼ 684 (700-2¼)

TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35

NE-4, 13 JUN 2024 to 11 JUL 2024

NE-4, 13 JUN 2024 to 11 JUL 2024