

WAAS CH 87021 W24A	APP CRS 244°	Rwy Idg TDZE 534 Apt Elev 618
--	------------------------	---

RNAV (GPS) RWY 24

ST LOUIS LAMBERT INTL (STL)

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Rwy 24 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¾ and LNAV Cats C, D and E visibility to 1½.

MALS

MISSED APPROACH:

Climb to 3000 direct SORUE and on track 294° to AUGST and hold.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	--	---	--------------------------------	-------

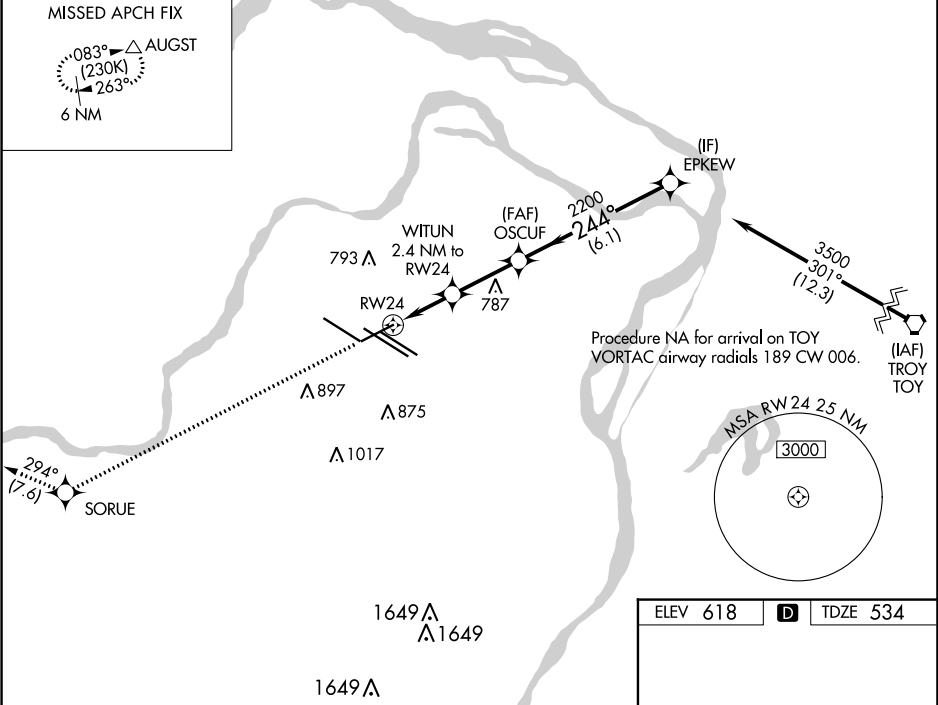

3000 ↑	SORUE ✱	tr 294°	AUGST △	EPKEW				
* LNAV only								
CATEGORY	A		B	C	D	E		
LPV DA			734/40	200 (200-¾)				
LNAV/VNAV DA			931/50	397 (400-1)				
LNAV MDA	1080/40 546 (500-¾)		1080-1⅔ 546 (500-1⅔)					

ELEV 618 D TDZE 534

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150

HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R