


LOC/DME I-MRZ <b>109.9</b> Chan 36	APP CRS <b>100°</b>	Rwy Idg TDZE Apt Elev	<b>9014</b> <b>421</b> <b>421</b>
--	------------------------	-----------------------------	---

# ILS or LOC RWY 10

SYRACUSE HANCOCK INTL (SYR)

DME or RADAR required.		MALSR 	MISSED APPROACH: Climb to 900 then climbing left turn to 3000 on heading 081° and on SYR VORTAC R-111 to STODA INT/ SYR VORTAC 15.5 DME/RADAR and hold.
<p>▼ TANUE fix minimums, for inoperative ALS, increase S-LOC 10</p> <p>▲ Cats C and D visibility to RVR 5500.</p> <p>**RVR 1800 authorized with use of FD or AP or HUD to DA.</p>			

ATIS <b>124.225</b>	SYRACUSE APP CON <b>126.125 269.125</b>	SYRACUSE TOWER <b>120.3 239.0</b>	GND CON <b>121.7 348.6</b>	CLNC DEL <b>125.05 257.775</b>
------------------------	--	--------------------------------------	-------------------------------	-----------------------------------

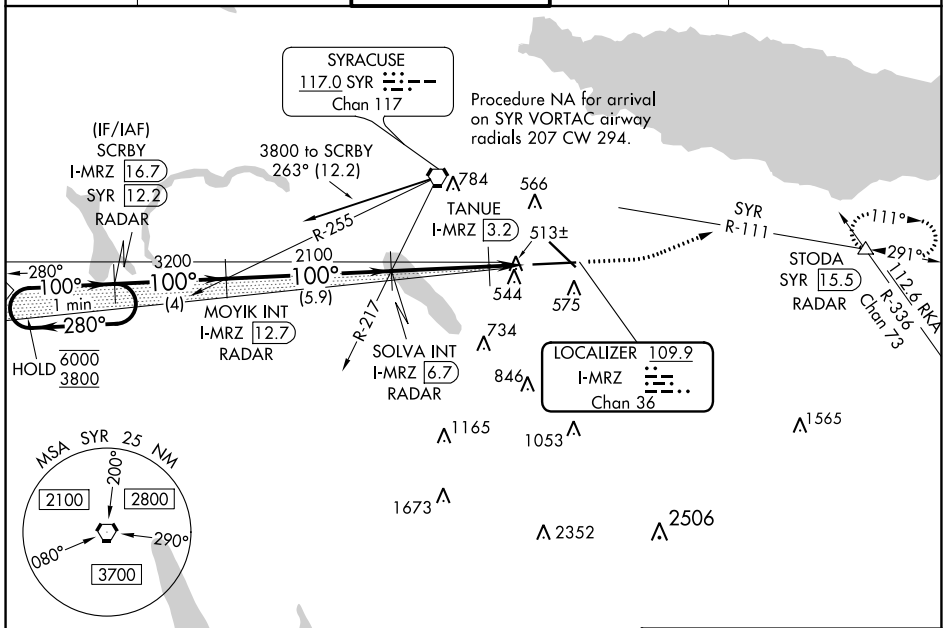

NE-2, 13 JUN 2024 to 11 JUL 2024

NE-2, 13 JUN 2024 to 11 JUL 2024

One Minute Holding Pattern	SCRBY I-MRZ 16.7 SYR 12.2 RADAR	MOYIK INT I-MRZ 12.7 RADAR	SOLVA INT I-MRZ 6.7 RADAR	TANUE I-MRZ 3.2 I-MRZ 2.6	STODA
6000 ← 280° 3800 → 100°	3200	2100	2100	*I-MRZ 1.6	△
GS 3.00° TCH 55	4 NM	5.9 NM	3.5 NM	0.6 NM	1 NM
CATEGORY	A	B	C	D	
S-ILS 10**	621/24		200 (200-1/2)		
S-LOC 10	980/24 559 (600-1/2)		980/60 559 (600-1 1/4)		
CIRCLING	980-1 559 (600-1)		1020-1 5/8 599 (600-1 1/2) 1180-2 1/2 759 (800-2 1/2)		
TANUE FIX MINIMUMS (DME REQUIRED)					
S-LOC 10	780/24 359 (400-1/2)		780/30 359 (400-3/4)		
CIRCLING	900-1 479 (500-1) 920-1 499 (500-1)		1020-1 1/2 599 (600-1 1/2) 1180-2 1/2 759 (800-2 1/2)		

