ILS or LOC RWY 11

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

LOC/DME I-MSY	APP CRS	Rwy Idg	9800
109.9	106°	TDZE	4
Chan 36		Apt Elev	4

RADAR or DME required.

For inop ALS, increase S-LOC 11 Cat C/D visibility to 1⅜ SM and increase WENUP fix minimums S-LOC 11 Cat C/D visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 on heading 130° and on LEV VORTAC R-354 to SAFES INT/LEV 38.5 DME and hold.

D-ATIS	NEW ORLEANS APP CON	NEW ORLEANS TOWER	GND CON	CLNC DEL	CPDLC
127.55	WEST 125.5 350.35 EAST 133.15 290.3	119.5 254.3	121.9 273.525	120.925	

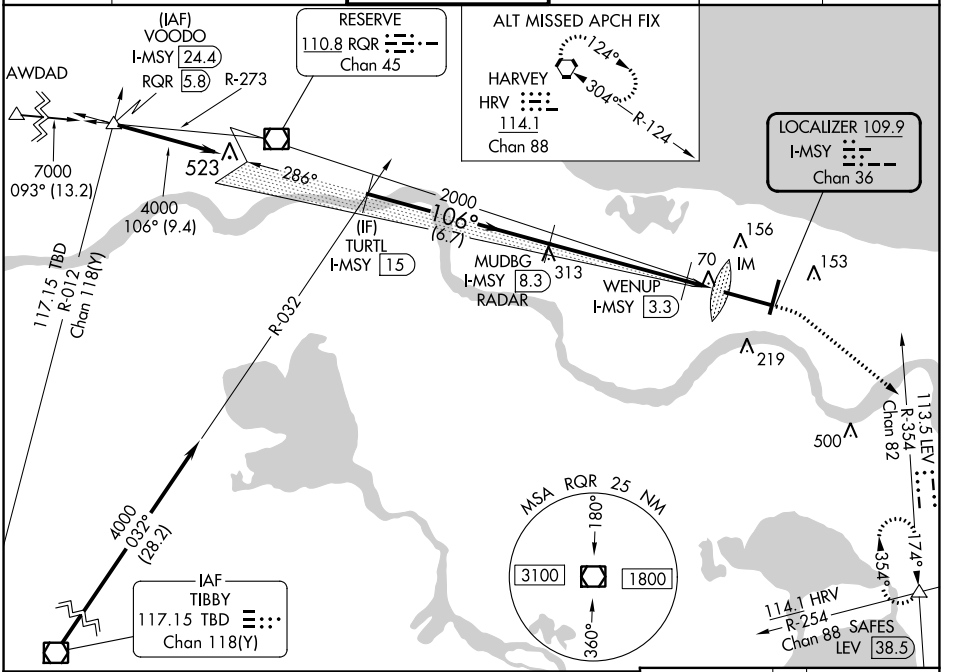

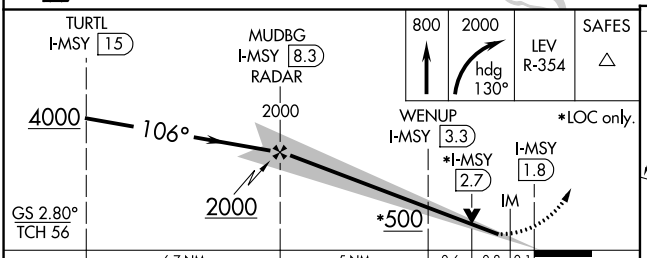

CATEGORY	A	B	C	D
S-ILS 11	204/18	200 (200-½)		
S-LOC 11	500/24	496 (500-½)	500/50	496 (500-1)
C CIRCLING	520-1	516 (600-1)	580-1½ 576 (600-1½)	600-2 596 (600-2)
WENUP FIX MINIMUMS				
S-LOC 11	320/24	316 (400-½)		
C CIRCLING	520-1	516 (600-1)	580-1½ 576 (600-1½)	600-2 596 (600-2)



RLLS Rwy 2
TDZ/CL Rwy 11
HIRL All Runways

FAF to MAP 6.5 NM

Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

SC-4, 13 JUN 2024 to 11 JUL 2024
SC-4, 13 JUN 2024 to 11 JUL 2024