

WAAS CH 50310 W01A	APP CRS 007°	Rwy Idg TDZE 685 Apt Elev 690
--	------------------------	---

RNAV (GPS) RWY 1
ALPENA COUNTY RGNL (APN)

RNP APCH.



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 48°C. When local altimeter setting not received, use Rogers City altimeter setting; increase all LPV DAs to 1029 feet, LNAV/VNAV DAs to 1084 feet and all MDAs 60 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C and D visibility ½ SM. Baro-VNAV and VDP NA when using Roger City altimeter setting. For inop ALS, increase LPV all Cats visibility to 1 SM.

MALSR

AS

MISSED APPROACH:
Climb to 3500 direct HIMVO and on track 307° to RABBO and hold.

ATIS 120.675 327.05	ALPENA APP CON ★ 128.425 379.3	ALPENA TOWER ★ 121.35 (CTAF) 0 318.1	GND CON 121.9 275.8	UNICOM 122.95
-------------------------------	--	--	-------------------------------	-------------------------

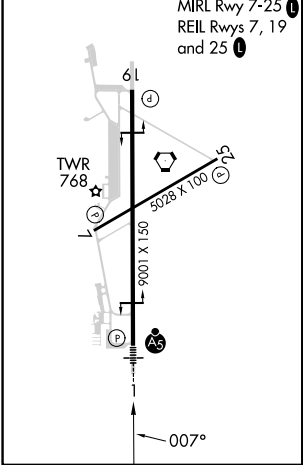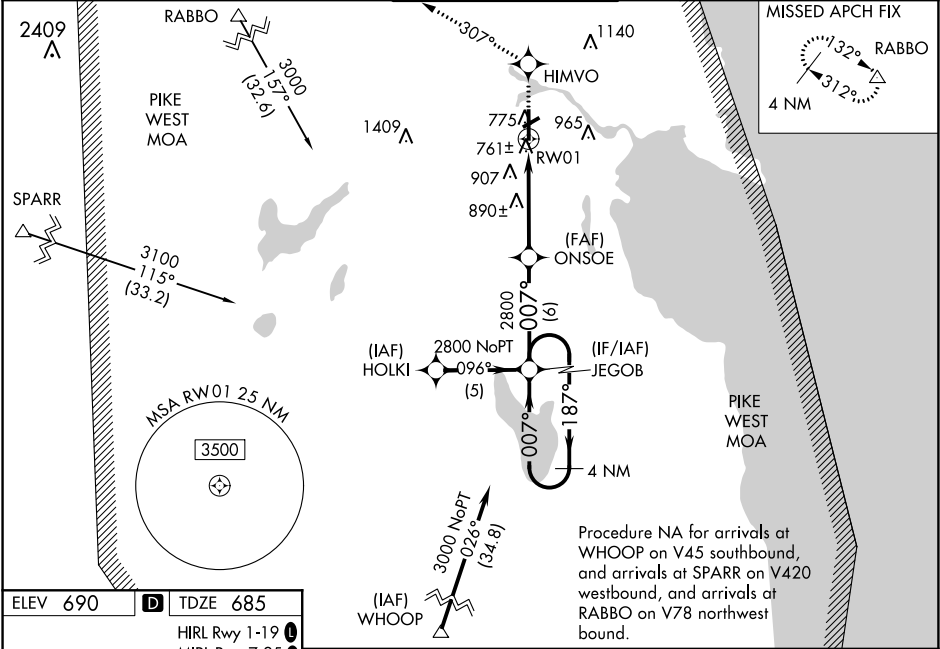

4 NM Holding Pattern	JEGOB	ONSOE	3500	HIMVO	tr 307°	RABBO
2800	187°	007°	2800			
GP 3.00° TCH 52						
	6 NM	5 NM	1.3			
CATEGORY	A	B	C	D		
LPV DA		974-½	289 (300-½)			
LNAV/VNAV DA		1029-¾	344 (400-¾)			
LNAV MDA	1160-½	475 (500-½)	1160-¾ 475 (500-¾)	1160-1 475 (500-1)		
C CIRCLING	1160-1	470 (500-1)	1220-1½ 530 (600-1½)	1280-2 590 (600-2)		