

HI-ILS or LOC Z RWY 33

LOC I-MIZ 109.5	APCH CRS 325°	Rwy ldg 12,001	TDZE 105
		Arprt Elev 113	

- (USAF)


BEALE AFB (KBAB)

RADAR or DME required

ALSF-1 MISSED APPROACH: Climb to 3600 intercept BAB R-326 to HAPAK and hold.

⚠ * When ALS inop, increase CAT CDE RVR to 40 and vis to 3/4 mile.
 ** When ALS inop, increase CAT CDE RVR to 60 vis to 1 1/8 miles.

ATIS* 124.55 273.5	NORCAL APP CON 125.4 259.1	TOWER* 119.4 284.75	GND CON 121.6 257.75
-------------------------------------	---	--------------------------------------	---------------------------------------

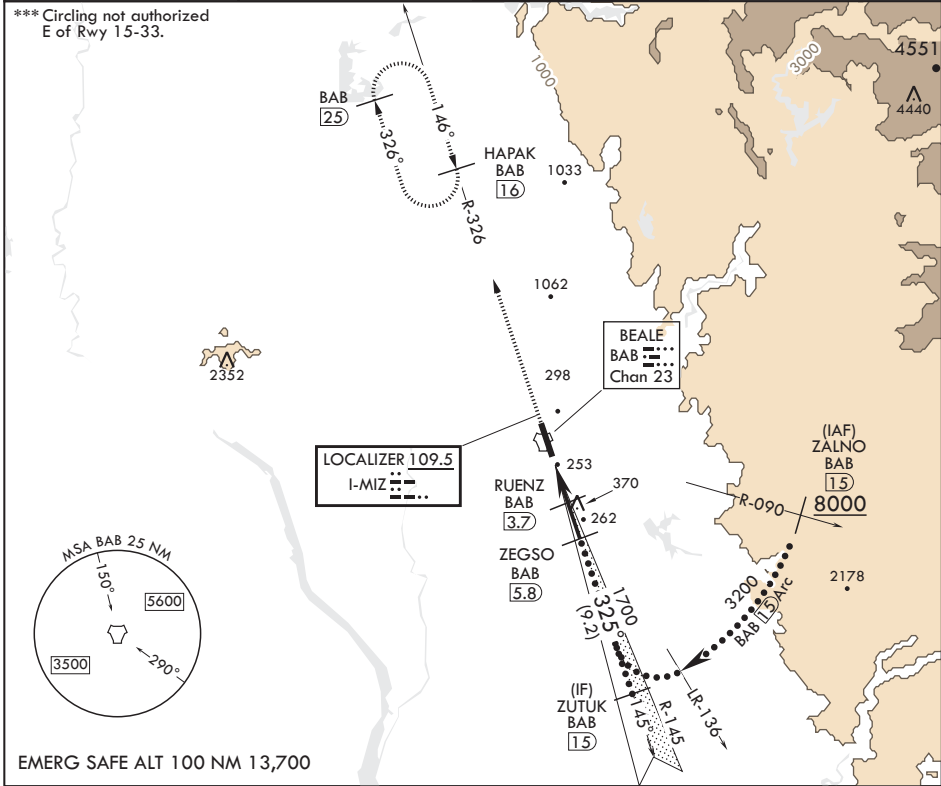

3600 BAB R-326	HAPAK BAB 16	ZUTUK R-145 15	ZALNO R-090 15	ELEV 113	TDZE 105
CATEGORY	C	D	E		
S-ILS 33*	305/24	200	(200-1/2)		
S-LOC 33**	520/40	415	(500-3/4)		
Ⓢ CIRCLING***	600-1 1/2 487 (500-1 1/2)	800-2 1/4 687 (700-2 1/4)	800-2 1/2 687 (700-2 1/2)		

SW-2, 13 JUN 2024 to 11 JUL 2024

SW-2, 13 JUN 2024 to 11 JUL 2024