


| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 45616 W23A | APP CRS 233° | Rwy Idg TDZE Apt Elev | 6215 931 947 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) Y RWY 23

WEST VIRGINIA INTL YEAGER (CRW)

| | | |
|---|---------------------|---|
| <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. ▲ For inoperative ALSF, increase LNAV/VNAV all Cats visibility to 2 1/4. **RVR 1800 authorized with use of FD or AP or HUD to DA.</p> | <p>ALSF-1 </p> | <p>MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 direct HVQ VOR/DME and hold.</p> |
|---|---------------------|---|



| | | | | |
|----------------------|--|--|-------------------------------|---------------------------|
| ATIS 127.6 | CHARLESTON APP CON 124.1 269.125 | CHARLESTON TOWER 125.7 257.8 | GND CON 121.8 348.6 | CLNC DEL 118.55 |
|----------------------|--|--|-------------------------------|---------------------------|

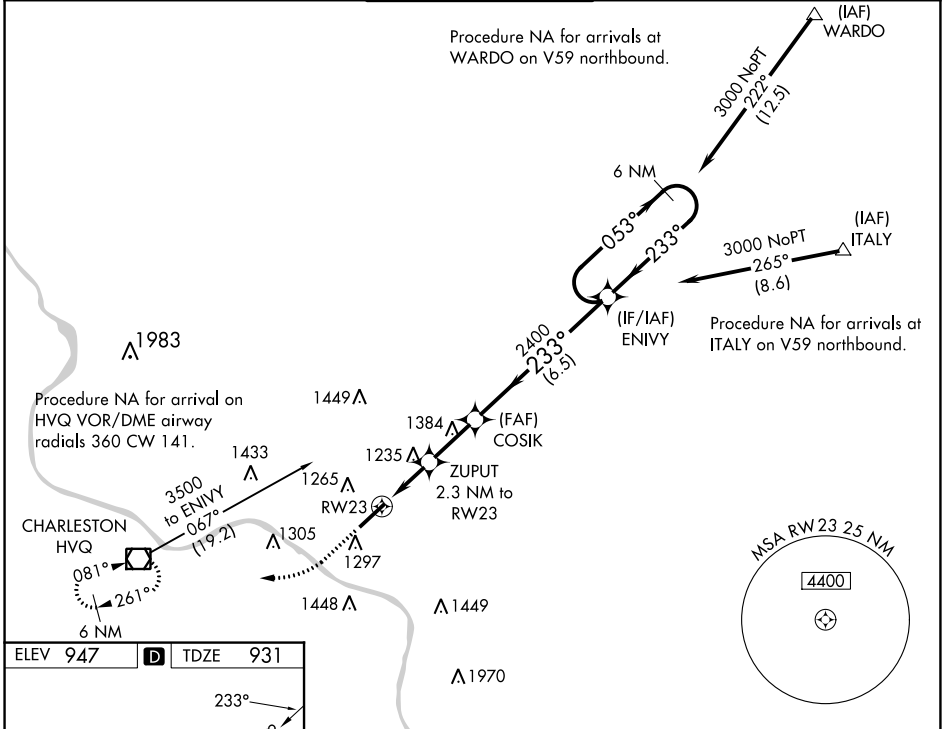

NE-4, 13 JUN 2024 to 11 JUL 2024

NE-4, 13 JUN 2024 to 11 JUL 2024

| | | |
|----------|----------|----------|
| ELEV 947 | D | TDZE 931 |
|----------|----------|----------|

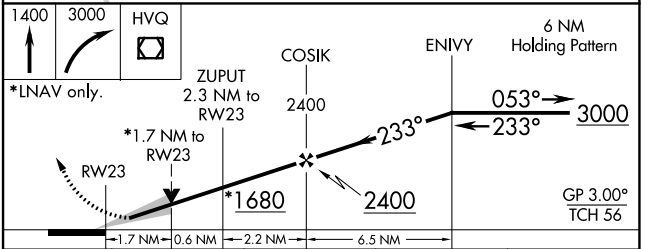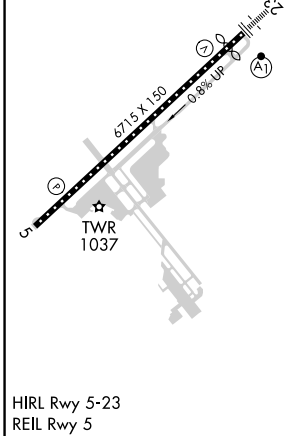

| CATEGORY | A | B | C | D |
|-------------------|---------|---------------|-------------------------------|-------------------------------|
| LPV DA** | | 1131/24 | 200 (200-1/2) | |
| LNAV/VNAV DA | | 1601-1 1/8 | 670 (700-1 1/8) | |
| LNAV MDA | 1500/24 | 569 (600-1/2) | 1500-1 3/8 | 569 (600-1 3/8) |
| C CIRCLING | 1600-1 | 653 (700-1) | 1760-2 1/2 813 (900-2 1/2) | 1760-2 3/4 813 (900-2 3/4) |