# RNAV (GPS) RWY 17

HOBART RGNL (HBR)

| WAAS CH **99417** **W17A** | APP CRS **173°** | Rwy Idg **5507** TDZE **1553** Apt Elev **1563** |
|---|---|---|

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cat C visibility ¼ mile. Baro-VNAV NA when using Altus/Quartz Mountain altimeter setting. VDP NA with Altus/Quartz Mountain altimeter setting.

MISSED APPROACH: Climb to 4000 direct DOMLE and hold.

| ASOS | ALTUS APP CON ★ | UNICOM |
|---|---|---|
| **133.325** | **125.1 353.7** | **122.8** (CTAF) |

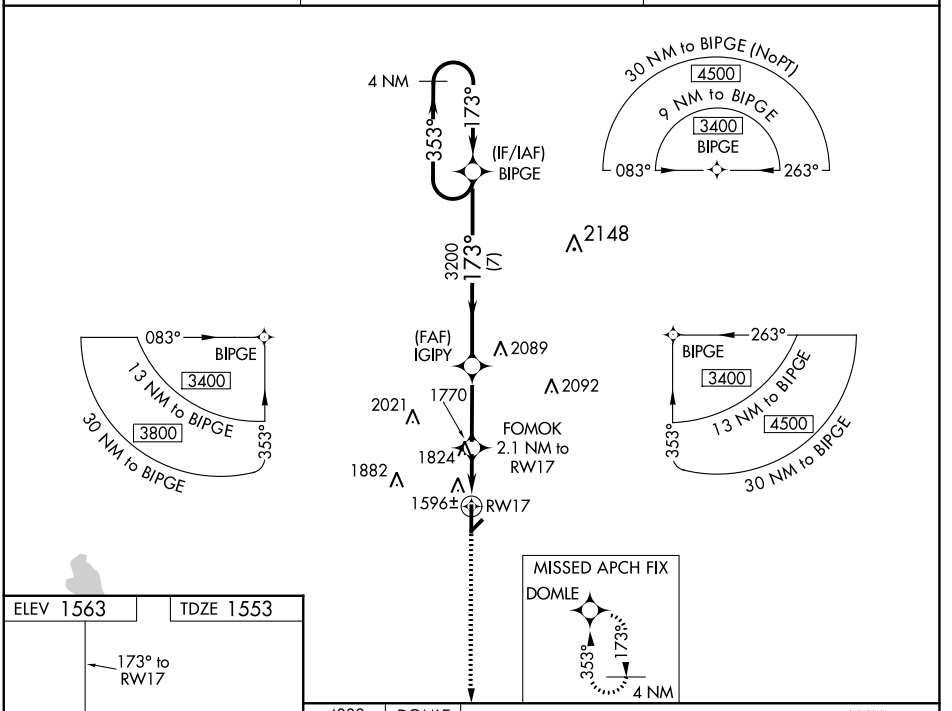


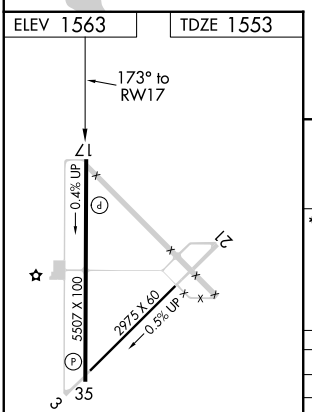


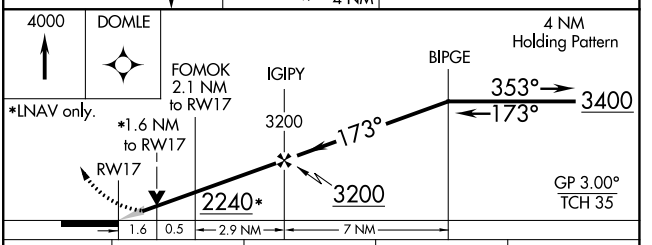


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1803-1 250 (300-1) | | | |
| LNAV/VNAV DA | 1900-1¼ 347 (400-1¼) | | | |
| LNAV MDA | 2080-1 527 (600-1) | | 2080-1½ 527 (600-1½) | 2080-1¾ 527 (600-1¾) |
| CIRCLING | 2080-1 517 (600-1) | | 2320-2¼ 757 (800-2¼) | 2460-3 897 (900-3) |

MIRL Rwy 17-35



SC-1, 13 JUN 2024 to 11 JUL 2024
SC-1, 13 JUN 2024 to 11 JUL 2024