LOC I-MWH	APP CRS	Rwy Idg	13492
109.5	324°	TDZE	1167
		Apt Elev	1189

ILS or LOC RWY 32R
GRANT COUNTY INTL (MWH)

When local altimeter setting not received, use Ephrata altimeter setting; increase all DA/MDA 40 feet and Circling Cat D visibility ¼ SM. For inop MALSR, increase S-LOC 32R Cat D visibility to RVR 5000.
*RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Ephrata altimeter setting.

MALSR

MISSED APPROACH: Climb to 1800, then climbing right turn to 4000 on MWH R-054 to BATUM INT/MWH 9.8 DME and hold, continue climb-in-hold to 4000.

ATIS	GRANT COUNTY APP CON *	GRANT COUNTY TOWER *	GND CON	UNICOM
119.05	126.4 379.95	118.25 (CTAF) L 257.8 (EAST) 128.0 257.8 (WEST)	121.9	122.95

ADF OR DME REQUIRED

EPHRATA 112.6 EPH Chan 73

WIPES

ALTERNATE MISSED APCH FIX

EPHRATA EPH 112.6 Chan 73

LOCALIZER 109.5 I-MWH

MOSES LAKE 115.0 MWH Chan 97

BATUM MWH 9.8

QUINT

PLUSS

RUBEL

LOM/IAF PELLY 408 MW MWH 6

MSA MW 25 NM

(QOBGE) x

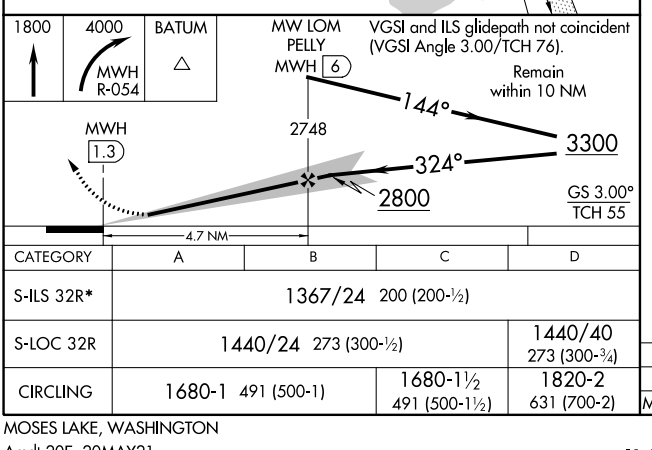

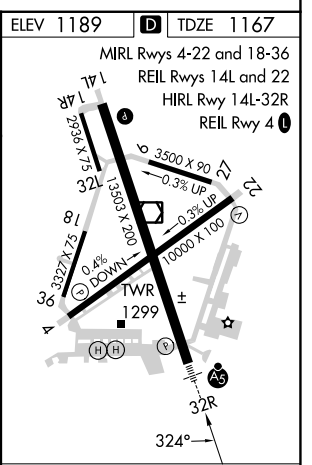

CATEGORY	A	B	C	D
S-ILS 32R*	1367/24 200 (200-½)			
S-LOC 32R	1440/24 273 (300-½)			1440/40 273 (300-¾)
CIRCLING	1680-1 491 (500-1)		1680-1½ 491 (500-1½)	1820-2 631 (700-2)

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

NW-1, 13 JUN 2024 to 11 JUL 2024
NW-1, 13 JUN 2024 to 11 JUL 2024