

WAAS CH <b>77617</b> <b>W09A</b>	APP CRS <b>090°</b>	Rwy Idg TDZE Apt Elev	<b>5998</b> <b>96</b> <b>112</b>
--	------------------------	-----------------------------	--

# RNAV (GPS) RWY 9


ESLER RGNL (E/SF)

RNP APCH-GPS.


**⚠** Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting; increase LPV DA to 331 feet; increase LNAV/VNAV DA to 644 feet and all visibility ¼ SM; increase all MDAs 40 feet and Circling visibility Cat D ¼.

MISSED APPROACH: Climb to 3000 direct ILULU and hold.

ESF ASOS <b>119.425</b>	POLK APP CON <b>125.4 254.8</b>	UNICOM <b>122.8 (CTAF) 0</b>
----------------------------	------------------------------------	---------------------------------

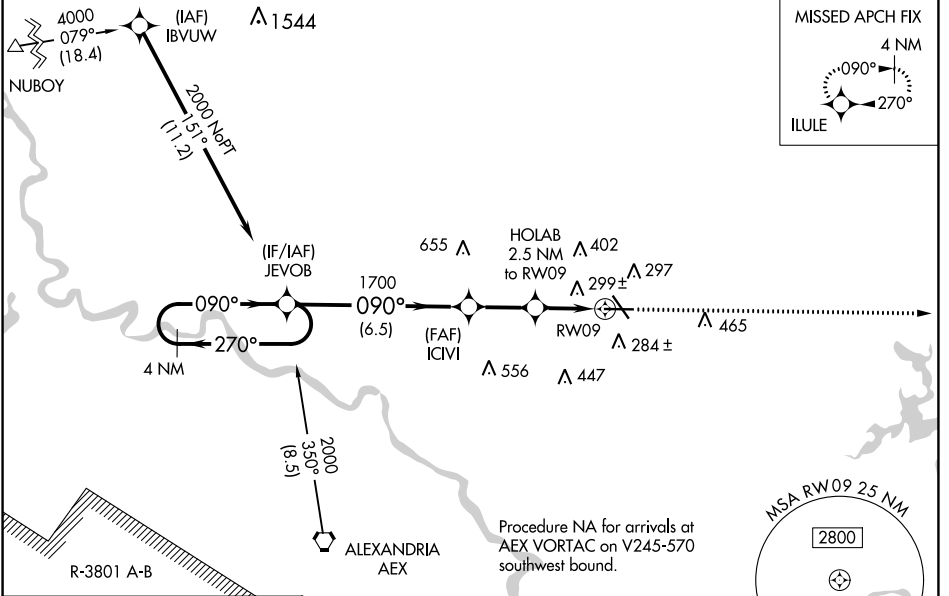

ELEV <b>112</b>	TDZE <b>96</b>
-----------------	----------------



4 NM Holding Pattern	JEVOB	ICIVI	HOLAB	RWY 09
2000	1700	1700	1700	1700
GP 3.00° TCH 53				
	6.5 NM	2.4 NM	1.2 NM	1.3 NM

CATEGORY	A	B	C	D
LPV DA		296-3/4	200 (200-3/4)	
LNAV/VNAV DA		609-13/8	513 (500-13/8)	
LNAV MDA	560-1	464 (500-1)	560-13/8	464 (500-13/8)
CIRCLING	600-1	488 (500-1)	740-13/4 628 (700-13/4)	760-2 648 (700-2)

REIL Rws 9, 14 and 32  
MIRL Rwy 14-32  
HIRL Rwy 9-27

SC-4, 13 JUN 2024 to 11 JUL 2024

SC-4, 13 JUN 2024 to 11 JUL 2024