WAAS	APP CRS		
CH **58304**	**005°**	Rwy Idg	**5264**
W36A		TDZE	**759**
		Apt Elev	**777**

RNAV (GPS) RWY 36
AUBURN UNIVERSITY RGNL (AUO)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Columbus altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Columbus altimeter setting: increase LPV DA to 1072 feet and visibility all Cats ⅛ SM; increase LNAV/VNAV DA to 1173 feet and visibility all Cats ⅜ SM; increase all MDA 120 feet and LNAV Cats C/D visibility ¼ SM and Circling Cats C/D visibility ½ SM. For inop ALS, increase LNAV/VNAV Cat D visibility ¼ SM and LNAV Cat D visibility ⅛ SM. For inop ALS, when using Columbus altimeter setting, increase LPV all Cats visibility to 1⅛ SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV all Cats visibility to 1⅜ SM.

MALSF

MISSED APPROACH: Climb to 3000 direct RIVME and hold.

AWOS-3PT	ATLANTA APP CON ★	CLNC DEL	UNICOM
132.575	**125.5 323.1**	**118.7**	**123.0** (CTAF) L

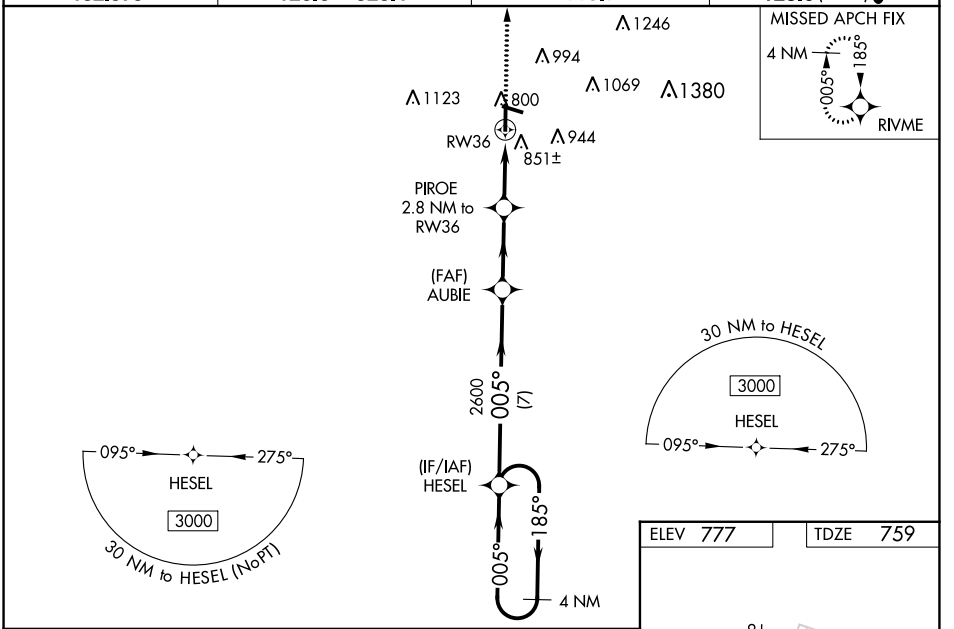

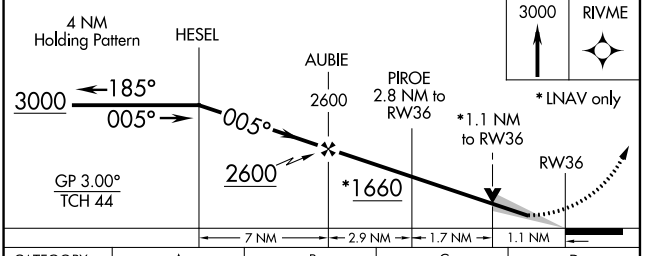

ELEV 777 TDZE 759

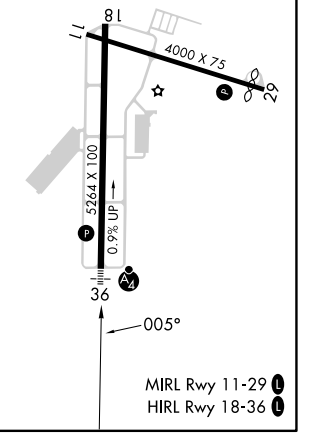

MIRL Rwy 11-29 L
HIRL Rwy 18-36 L

CATEGORY	A	B	C	D
LPV DA	959-¾	200 (200-¾)		
LNAV/VNAV DA	1060-⅞	301 (300-⅞)		
LNAV MDA	1120-¾	361 (400-¾)	1120-⅞	361 (400-⅞)
C CIRCLING	1280-1 503 (600-1)	1360-1 583 (600-1)	1380-1¾ 603 (700-1¾)	1480-2¼ 703 (800-2¼)

SE-4, 13 JUN 2024 to 11 JUL 2024