

WAAS CH 50511 W28A	APP CRS 276°	Rwy Idg TDZE Apt Elev	6000 975 975
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 28

LIMA ALLEN COUNTY (AOH)

⚠ Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). When local altimeter setting not received, use Findlay altimeter setting and increase LPV DA to 1255, LNAV/VNAV DA to 1477 and all MDAs 80 feet; increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cats C/D ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Findlay altimeter setting.

MISSED APPROACH:
Climb to 3000 direct UCAYU and hold.

ASOS 128.725	COLUMBUS APP CON 121.825 323.15	UNICOM 122.7 (CTAF) 0
------------------------	---	---------------------------------

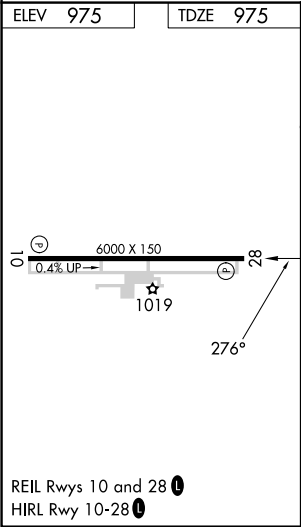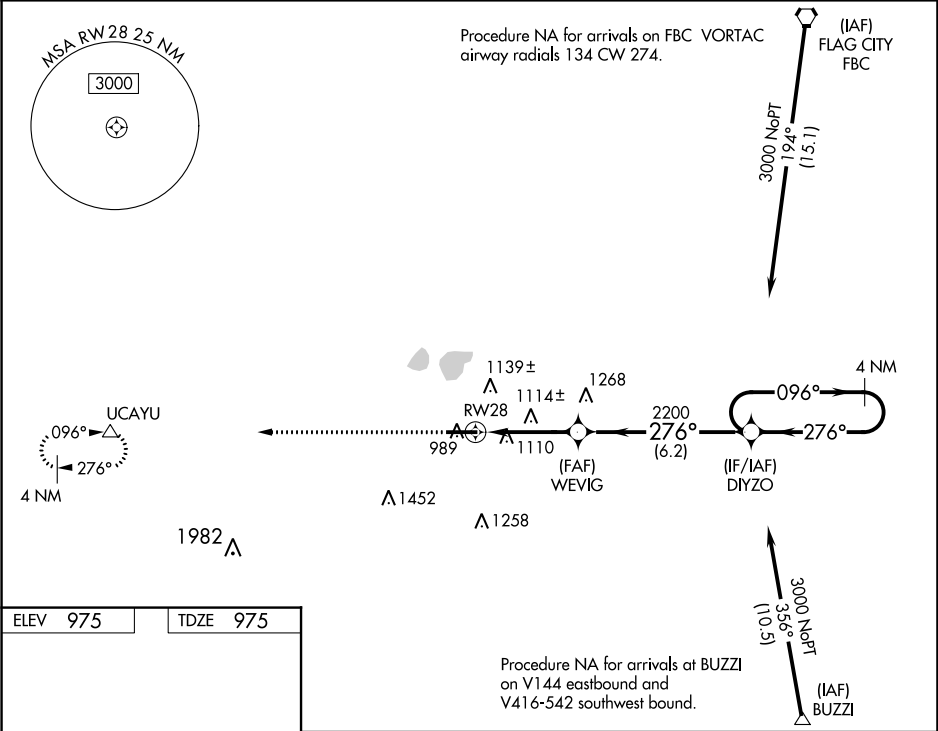

3000 UCAYU ↑ △				DIYZO 4 NM Holding Pattern			
*LNAV only				2200 276° 096° 3000			
*1.1 NM to RW28				GP 3.00° TCH 49			
RW28							
1.1 NM 2.6 NM 6.2 NM							
CATEGORY	A		B		C		D
LPV DA			1175-¾		200 (200-¾)		
LNAV/VNAV DA			1397-1⅓		422 (500-1⅓)		
LNAV MDA	1380-1		405 (500-1)		1380-1½		405 (500-1½)
CIRCLING	1420-1 445 (500-1)		1440-1 465 (500-1)		1540-1½ 565 (600-1½)		1820-2¾ 845 (900-2¾)