RNAV (GPS) RWY 4

DOUGLAS MUNI (DQH)

WAAS	APP CRS	Rwy Idg	6000
CH 93824	043°	TDZE	253
W04A		Apt Elev	257

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to ⅞ SM and LNAV Cat C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OLHUP and hold.

AWOS-3	JACKSONVILLE CENTER	UNICOM
119.075	127.575 269.025	122.8 (CTAF) L

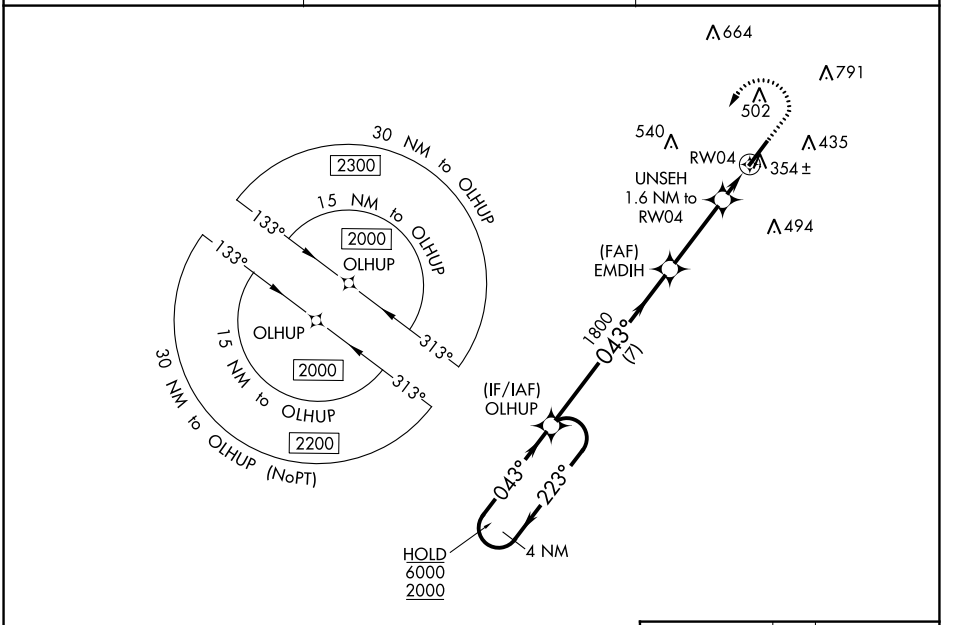

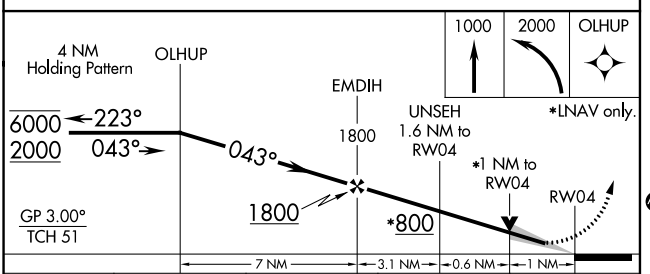

CATEGORY	A	B	C	D
LPV DA	453-½ 200 (200-½)			
LNAV/VNAV DA	538-½ 285 (300-½)			
LNAV MDA	620-½ 367 (400-½)		620-⅝ 367 (400-⅝)	
C CIRCLING	720-1 463 (500-1)	820-1 563 (600-1)	960-2 703 (800-2)	1160-3 903 (1000-3)

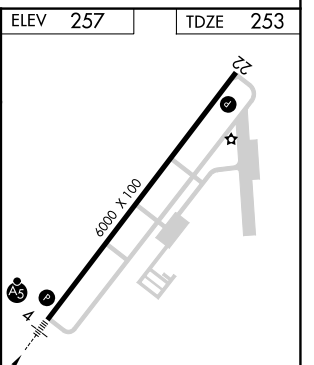

SE-4, 13 JUN 2024 to 11 JUL 2024
SE-4, 13 JUN 2024 to 11 JUL 2024