WAAS	APP CRS	Rwy Idg	5639
CH 65920	128°	TDZE	1182
W13A		Apt Elev	1183

RNAV (GPS) RWY 13

FERGUS FALLS MUNI/EINAR MICKELSON FLD (FFM)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Elbow Lake altimeter setting and increase LPV DA to 1428 feet, increase LNAV/VNAV DA to 1516 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA when using Elbow Lake altimeter setting.

MISSED APPROACH: Climb to 2900 direct IGAKE and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
119.05	126.1 269.2	122.8 (CTAF) L

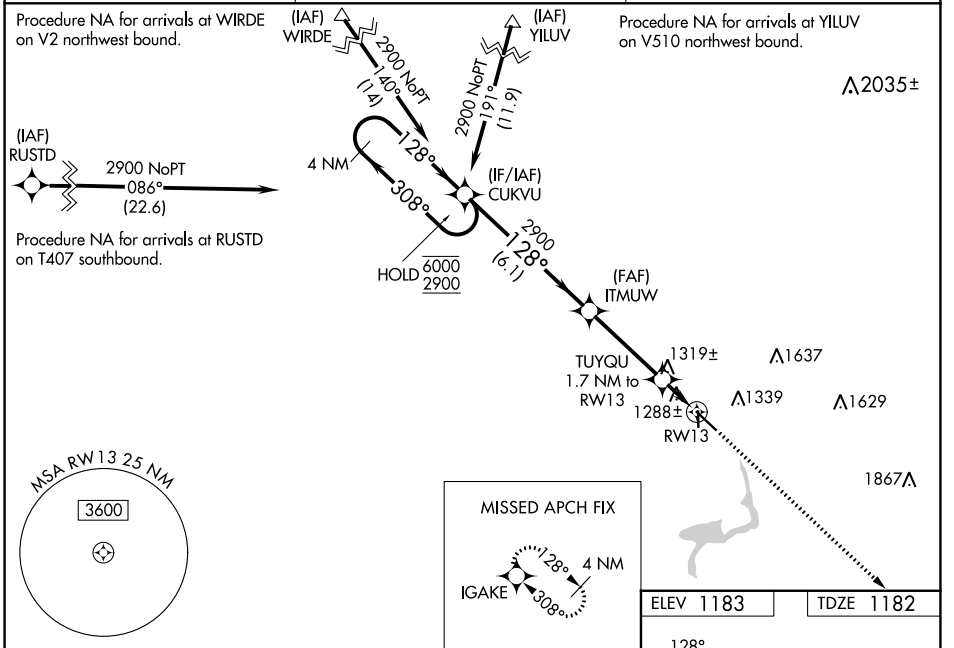

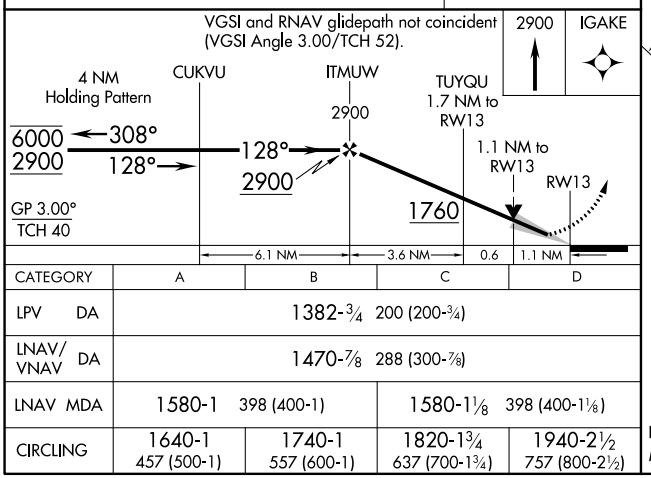

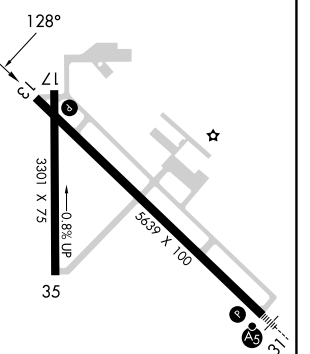

CATEGORY	A	B	C	D
LPV DA	1382-¾ 200 (200-¾)			
LNAV/VNAV DA	1470-⅞ 288 (300-⅞)			
LNAV MDA	1580-1 398 (400-1)		1580-1⅛ 398 (400-1⅛)	
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1¾ 637 (700-1¾)	1940-2½ 757 (800-2½)

REIL Rwys 13 and 35 L
MIRL Rwys 13-31 and 17-35 L

NC-1, 13 JUN 2024 to 11 JUL 2024
NC-1, 13 JUN 2024 to 11 JUL 2024