

WAAS CH 40207 W22A	APP CRS 221°	Rwy Idg 5175 TDZE 72 Apt Elev 72
--	------------------------	---

RNAV (GPS) RWY 22


EASTON/NEWNAM FLD (E5N)

RNP APCH.


Baro-VNAV NA when using Baltimore altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Rwy 22 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Baltimore altimeter setting and increase all DA 93 feet and all MDA 100 feet; increase LPV all Cats visibility 1/8 SM, increase LNAV/VNAV all Cats visibility 1/4 SM, and increase LNAV Cats C and D 1/4 SM.

MISSED APPROACH: Climb to 2000 direct RIKME and hold.

ATIS 124.475	POTOMAC APP CON 133.75 254.35	EASTON TOWER ★ 118.525 (CTAF)	GND CON 119.075	CLNC DEL 119.075
------------------------	---	--	---------------------------	----------------------------

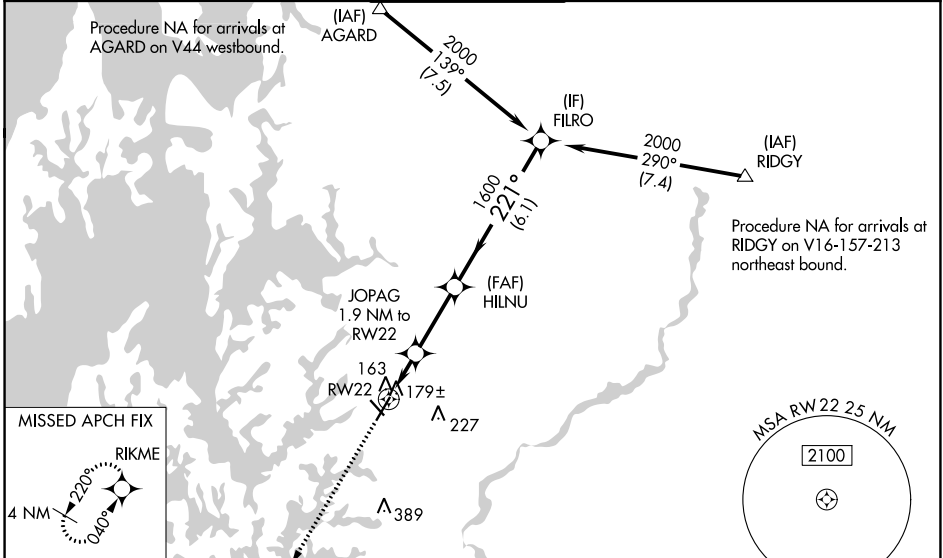

ELEV 72	D	TDZE 72
---------	----------	---------

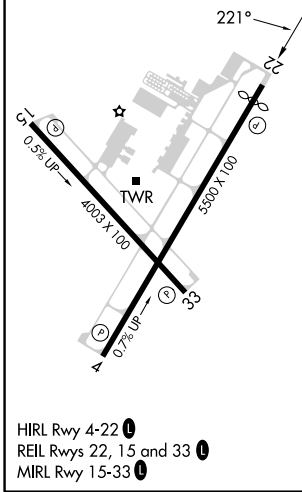

2000	RIKME				
*LNAV only					
RWY 22		JOPAG 1.9 NM to RWY 22	HILNU 1600	FILRO 2000	GP 3.00° TCH 45
1.9 NM		2.8 NM		6.1 NM	
CATEGORY	A	B	C	D	
LPV DA		322-1 250 (300-1)			
LNAV/VNAV DA		362-1 290 (300-1)			
LNAV MDA		440-1 368 (400-1)			

NE-3, 13 JUN 2024 to 11 JUL 2024

NE-3, 13 JUN 2024 to 11 JUL 2024