WAAS CH 53402 W26A	APP CRS 264°	Rwy ldg 6002 TDZE 686 Apt Elev 698

RNAV (GPS) RWY 26
WEST MICHIGAN RGNL (BIV)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
For inoperative ALS, increase LNAV/VNAV all Cats visibility to 1 SM; increase LNAV Cat C visibility to 1⅛ SM.

MALSR

MISSED APPROACH: Climb to 2700 direct HOXON and hold.

ASOS	GREAT LAKES APP CON★	CLNC DEL	UNICOM
119.025	133.825 290.35	123.95	123.05 (CTAF) L

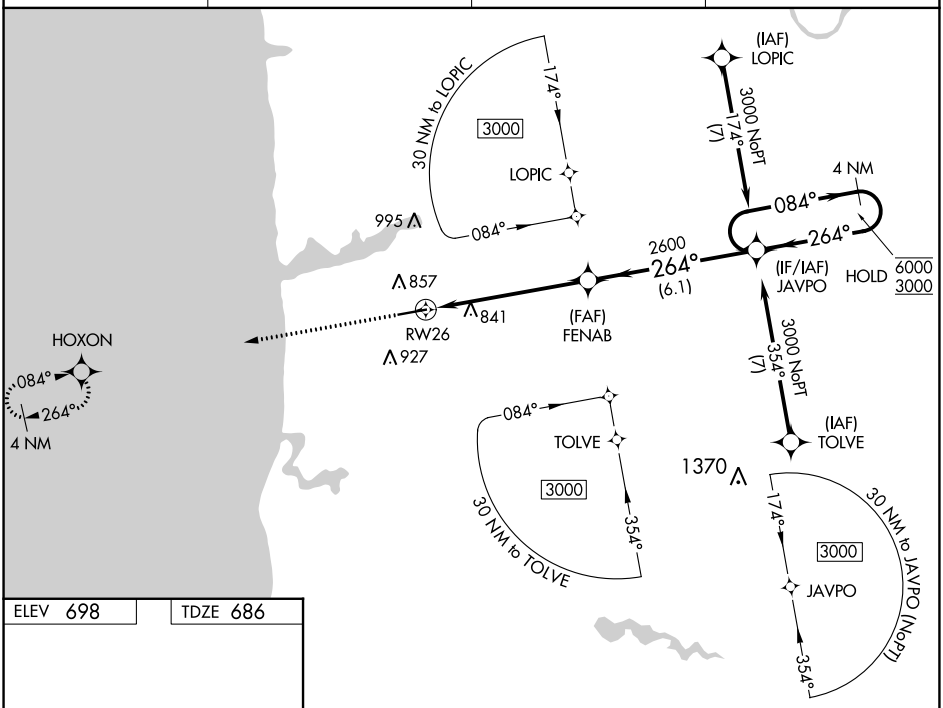

ELEV 698 TDZE 686



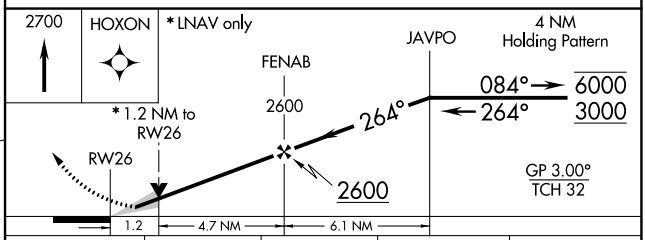

CATEGORY	A	B	C	D
LPV DA	886-½ 200 (200-½)			NA
LNAV/VNAV DA	1040-⅝ 354 (400-⅝)			NA
LNAV MDA	1100-½ 414 (500-½)		1100-¾ 414 (500-¾)	NA
C CIRCLING	1200-1 502 (600-1)	1240-1 542 (600-1)	1240-1½ 542 (600-1½)	NA

REIL Rwy 8 L
HIRL Rwy 8-26 L

EC-1, 13 JUN 2024 to 11 JUL 2024

EC-1, 13 JUN 2024 to 11 JUL 2024