RNAV (GPS) RWY 28

BLOCK ISLAND STATE (BID)

WAAS	APP CRS	Rwy Idg	2502
CH 70501	279°	TDZE	108
W28A		Apt Elev	108

DME/DME RNP-0.3 NA. If local altimeter setting not received, use Westerly State altimeter setting and increase all DAs/MDAs 40 feet. Baro-VNAV and VDP NA when using Westerly State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 1500 direct CUGDA and on track 287° to SUFOK and hold.

AWOS-3PT	PROVIDENCE APP CON ★	CLNC DEL	UNICOM
134.775	125.75 319.2	120.1	123.0 (CTAF) L

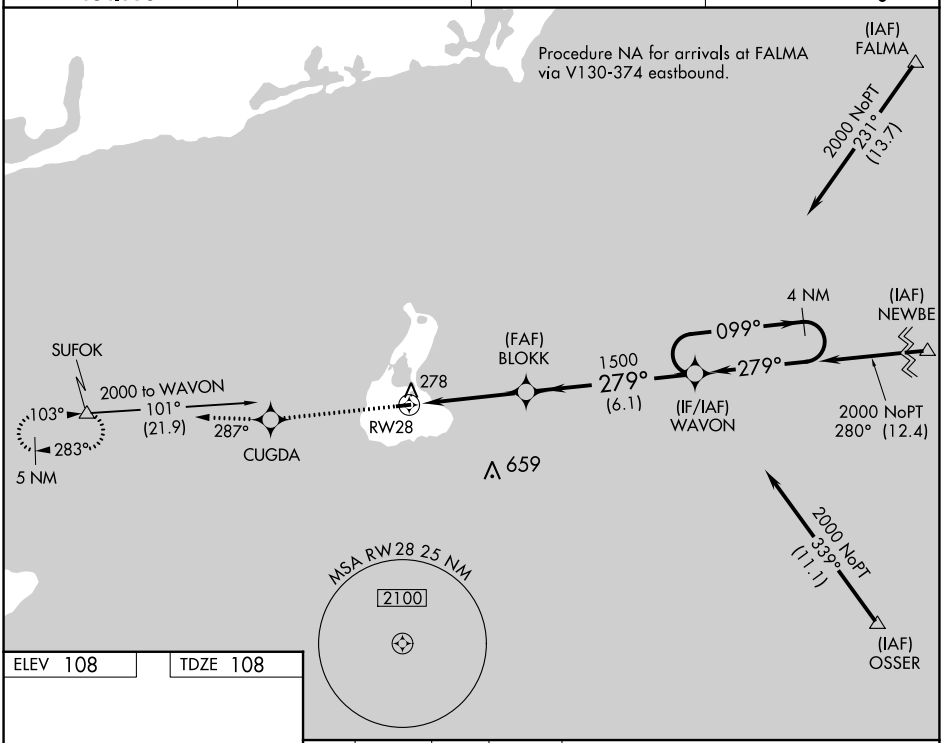

ELEV 108	TDZE 108



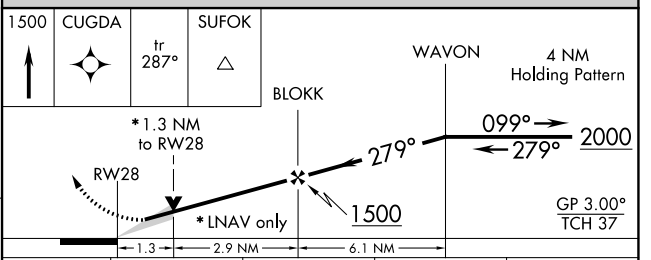

CATEGORY	A	B	C	D
LPV DA	358-1 250 (300-1)			NA
LNAV/VNAV DA	570-1¾ 462 (500-1¾)			NA
LNAV MDA	540-1 432 (500-1)		540-1¼ 432 (500-1¼)	NA
CIRCLING	640-1 532 (600-1)		640-1½ 532 (600-1½)	NA

REIL Rwys 10 and 28 L
MIRL Rwy 10-28 L

NE-1, 13 JUN 2024 to 11 JUL 2024
NE-1, 13 JUN 2024 to 11 JUL 2024