


LOC I-AEG	APP CRS	Rwy Idg	7398
110.1	215°	TDZE	5817
		Apt Elev	5837

ILS or LOC RWY 22

DOUBLE EAGLE II (AEG)

⚠ NA When local altimeter setting not received, use Albuquerque Intl Support altimeter setting and increase all DA 94 feet, increase all MDA 100 feet, and increase visibility S-LOC 22 Cats C/D ¼ mile, Circling Cats C/D ½ mile. For inop MALSR when using Albuquerque Intl Support altimeter setting, increase visibility S-ILS 22 all Cats ¾ mile.			MALSR 	MISSED APPROACH: Climb to 6500 then climbing right turn 7700 direct DUDLE LOM and hold.
ATIS	ALBUQUERQUE APP CON	DOUBLE EAGLE II TOWER ★	GND CON	CLNC DEL
119.025	127.4 253.5	120.15 (CTAF) 0	121.625	124.8 (When twr closed)

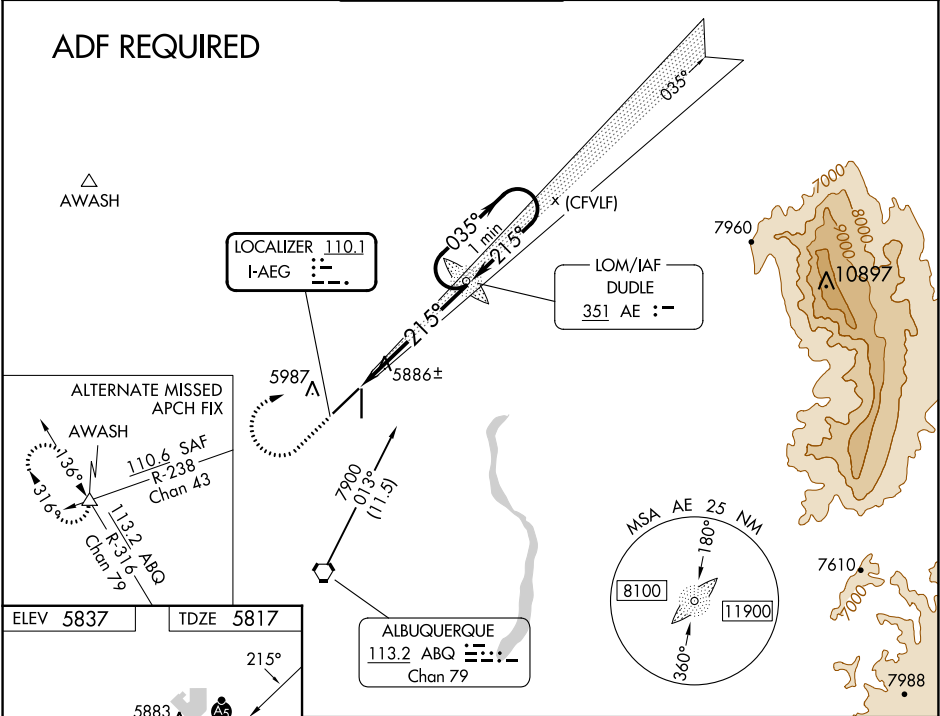

REIL Rwy's 17 and 35					
MIRL Rwy's 4-22 and 17-35					
FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

6500	7700	AE	AE LOM	7629	One Minute Holding Pattern
↑	↷	↗			
215°					
035°					
7700					
GS 3.00°					
TCH 55					
5.5 NM					
CATEGORY	A	B	C	D	
S-ILS 22	6017-½ 200 (200-½)				
S-LOC 22	6140-½ 323 (400-½)				
☒ CIRCLING	6400-1 563 (600-1)		6420-1½ 583 (600-1½)		6640-2½ 803 (900-2½)