RNAV (GPS) RWY 1

RICE LAKE RGNL/CARL'S FLD (RPD)

WAAS	APP CRS		
CH **86217**	**010°**	Rwy Idg	**6500**
W01A		TDZE	**1101**
		Apt Elev	**1109**

If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all DAs/MDAs 120 feet. DME/DME RNP-0.3 NA. Baro-VNAV NA below -17°C (3°F). Baro VNAV and VDP NA when using Chippewa Valley Rgnl altimeter setting. For inoperative MALSR, increase LPV visibility to 1, and LNAV Cat D visibility to 1¼. Circling Rwy 13, 31 NA at night.

MALSR

MISSED APPROACH: Climb to 3200 direct ORBEW and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
120.525	**125.3 335.6**	**122.7** (CTAF) L

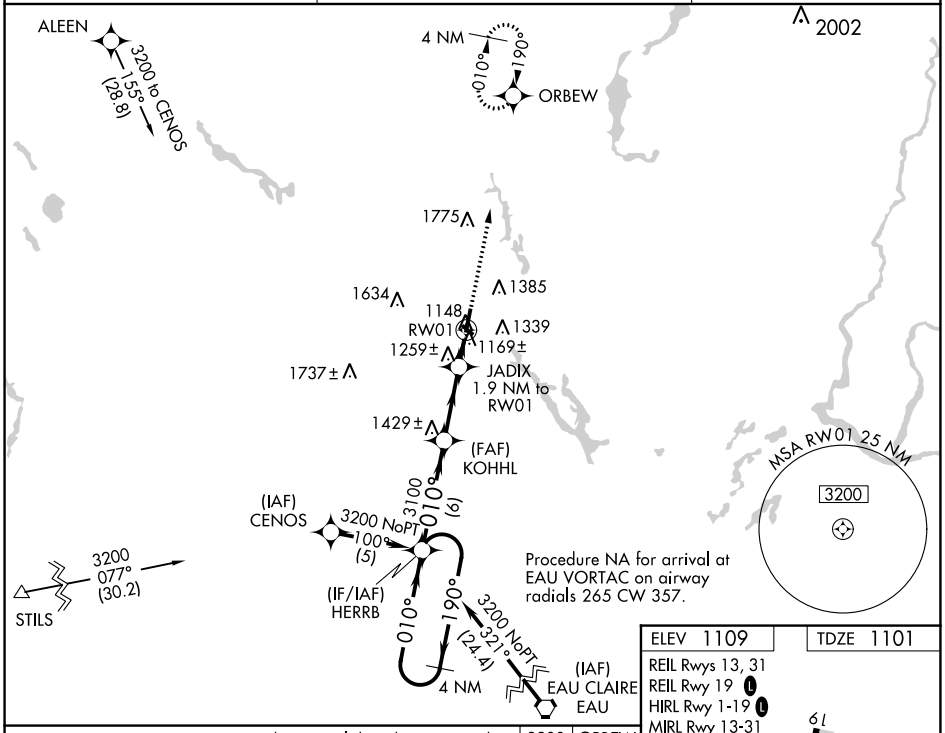

ELEV 1109	TDZE 1101
REIL Rwys 13, 31	
REIL Rwy 19 L	
HIRL Rwy 1-19 L	
MIRL Rwy 13-31	

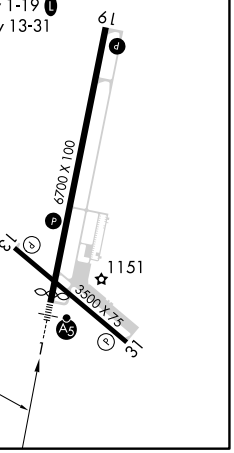

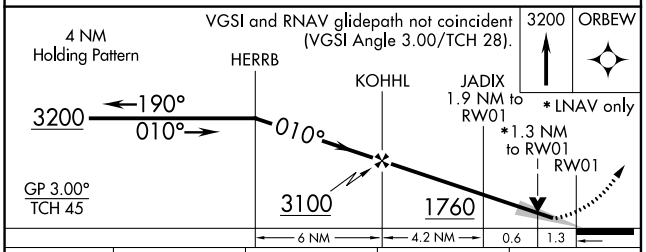

CATEGORY	A	B	C	D
LPV DA	1390-½		289 (300-½)	
LNAV/VNAV DA	1440-¾		339 (400-¾)	
LNAV MDA	1520-½ 419 (500-½)		1520-¾ 419 (500-¾)	1520-1 419 (500-1)
C CIRCLING	1600-1¼ 493 (500-1¼)	1740-1¼ 631 (700-1¼)	1740-1¾ 631 (700-1¾)	1940-2¾ 831 (900-2¾)

EC-3, 13 JUN 2024 to 11 JUL 2024
EC-3, 13 JUN 2024 to 11 JUL 2024